

S

T

S

L

A

B



RADIO TEST REPORT

Report No: STS1609183W02

Issued for

Digicom Trading (PVT) Limited

Room No.302, 3rd floor, the forum, Clifton, Karachi, Pakistan

Product Name:	Mobile Phone
Brand Name:	QMobile
Test Model Name:	E500i Music
Series Model:	N/A
Test Standard:	ETSI EN 300 328 V1.9.1 (2015-02)

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.
1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,
Fuyong Street, Bao'an District, Shenzhen, Guangdong, China
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail: sts@stsapp.com





TEST REPORT CERTIFICATION

Applicant's name : Digicom Trading (PVT) Limited
 Address : Room No.302, 3rd floor, the forum, Clifton, Karachi, Pakistan
Manufacture's Name : HK YBHS ELECTROIC DIGITAL TECHNOLOGY CO.,LIMITED
 Address : 2th Floor, Block C, Academy Of Aerospace Technology Building,
 Keji South 10th Rd, Hi-tech Park, Nanshan District, Shenzhen,
 China

Product description

Product name : Mobile Phone
 Trademark : QMobile
 Model and/or type reference : E500i Music
 Series Model : N/A

Standards : ETSI EN 300 328 V1.9.1 (2015-02)

This device described above has been tested by STS, and the test results show that the equipment under test (EUT) is in compliance with the 1999/5/EC R&TTE Directive Art.3.2 requirements. And it is applicable only to the tested sample identified in the report.


This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.


Date of Test :

Date (s) of performance of tests : 23 Sep. 2016 ~ 29 Sep. 2016

Date of Issue : 30 Sep. 2016

Test Result : **Pass**

Testing Engineer : 
 (Tony Liu)

Technical Manager : 
 (Vita Li)


Authorized Signatory : 
 (Bovey Yang)





TABLE OF CONTENTS

1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 TEST CONDITIONS AND CHANNEL	13
2.3 DESCRIPTION OF TEST CONDITIONS	13
2.4 DESCRIPTION OF SUPPORT UNITS	14
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	15
3. RF OUTPUT POWER	16
3.1 APPLIED PROCEDURES / LIMIT	16
3.2 TEST PROCEDURES	16
3.3 TEST SETUP LAYOUT	16
3.4 TEST RESULT	17
4. ACCUMULATED TRANSMIT TIME,FREQUENCY OCCUPATION & HOPPING SEQUENCE	20
4.1 APPLIED PROCEDURES / LIMIT	20
4.2 TEST PROCEDURE	22
4.3 TEST SETUP	22
4.4 TEST RESULT	23
5. HOPPING FREQUENCY SEPARATION	27
5.1 APPLIED PROCEDURES / LIMIT	27
5.2 TEST PROCEDURE	27
5.3 TEST SETUP	27
5.4 TEST RESULT	28
6. OCCUPIED CHANNEL BANDWIDTH	29
6.1 APPLIED PROCEDURES / LIMIT	29
6.2 TEST PROCEDURES	29
6.3 TEST SETUP LAYOUT	29
6.4 TEST RESULT	30
7. TRANSMITTER UNWANTED EMISSIONS IN THE OOB DOMAIN	34
7.1 APPLIED PROCEDURES / LIMIT	34
7.2 MEASURING INSTRUMENTS AND SETTING	34



TABLE OF CONTENTS

7.3 TEST SETUP LAYOUT	34
7.4 TEST RESULT	35
8. SPURIOUS EMISSIONS – TRANSMITTER	39
8.1 APPLIED PROCEDURES / LIMIT	39
8.2 MEASURING INSTRUMENTS AND SETTING	39
8.3 TEST PROCEDURES	40
8.4 TEST SETUP LAYOUT	40
8.5 EUT OPERATION DURING TEST	41
8.6 TEST RESULT (30MHz ~ 12750MHz)	42
9. SPURIOUS EMISSIONS – RECEIVER	44
9.1 APPLIED PROCEDURES / LIMIT	44
9.2 MEASURING INSTRUMENTS AND SETTING	44
9.3 TEST PROCEDURES	44
9.4 EUT OPERATION DURING TEST	45
9.5 TEST SETUP LAYOUT	45
9.6 TEST RESULT (30MHz ~ 12750MHz)	46
10. RECEIVER BLOCKING	47
10.1 APPLIED PROCEDURES / LIMIT	47
10.2 TEST PROCEDURES	47
10.3 TEST SETUP LAYOUT	48
10.4 TEST RESULT	48
11. ADAPTIVE (CHANNEL ACCESS MECHANISM)	49
11.1 APPLIED PROCEDURES / LIMIT	49
11.2 TEST PROCEDURES	49
11.3 TEST SETUP LAYOUT	50
11.4 TEST RESULTS	50



Revision History

Rev.	Issue Date	Report No.	Effect Page	Contents
00	30 Sep. 2016	STS1609183W02	ALL	Initial Issue

Note: **Format version** of the report -V01





1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

ETSI EN 300 328 V1.9.1			
Test Item	Limit	Frequency Range (MHz)	Applicable (Yes/No)
TRANSMITTER PARAMETERS			
RF output power	Clause 4.3.1.2.3	2400-2483.5	Y
Duty Cycle, Tx-sequence, Tx-gap	Clause 4.3.1.3.3		N
Accumulated Transmit time, Frequency Occupation & Hopping Sequence	Clause 4.3.1.4.3		N
Hopping Frequency Separation	Clause 4.3.1.5.3		Y
Medium Utilisation	Clause 4.3.1.6.3		N
Adaptivity(Adaptive Frequency Hopping)	Clause 4.3.1.7		Y
Occupied Channel Bandwidth	Clause 4.3.1.8.3		Y
Transmitter unwanted emissions in the OOB domain	Clause 4.3.1.9.3		Y
Transmitter unwanted emissions in the spurious domain	Clause 4.3.1.10.3		Y
RECEIVER PARAMETERS			
Spurious emissions (conducted)	Clause 4.3.1.11.3	30-12750	N
Spurious emissions (radiated)			Y
Receiver Blocking	Clause 4.3.1.12.3	2400-2483.5	Y
Geo-location capability	Clause 4.3.1.13.3	--	N



1.1 TEST FACTORY

Company Name:	Shenzhen STS Test Services Co., Ltd.
Address:	1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road, Fuyong Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	+86-755 3688 6288
Fax:	+86-755 3688 6277
Registration No.:	CNAS Registration No.: L7649; FCC Registration No.: 842334; IC Registration No.: 12108A-1

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	RF power, conducted	± 0.70 dB
2	Spurious emissions, conducted	± 1.19 dB
3	Spurious emissions, radiated(>1G)	± 2.83 dB
4	Spurious emissions, radiated(<1G)	± 3.01 dB
5	Temperature	± 0.5 °C
6	Humidity	± 2 %



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Mobile Phone												
Brand Name	QMobile												
Model Name	E500i Music												
Series Model	N/A												
Model Difference	N/A												
Product Description	<p>The EUT is Mobile Phone</p> <table border="1"><tr><td>Operation Frequency:</td><td>2402~2480 MHz</td></tr><tr><td>Modulation Type:</td><td>BT(1Mbps): GFSK BT EDR(2Mbps): $\pi/4$-DQPSK BT EDR(3Mbps): 8DPSK</td></tr><tr><td>Number Of Channel:</td><td>79CH</td></tr><tr><td>Antenna Designation:</td><td>Dipole Antenna</td></tr><tr><td>Antenna Gain(Peak):</td><td>1 dBi</td></tr><tr><td>Power Rating:</td><td>DC 3.7V by battery</td></tr></table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</p>	Operation Frequency:	2402~2480 MHz	Modulation Type:	BT(1Mbps): GFSK BT EDR(2Mbps): $\pi/4$ -DQPSK BT EDR(3Mbps): 8DPSK	Number Of Channel:	79CH	Antenna Designation:	Dipole Antenna	Antenna Gain(Peak):	1 dBi	Power Rating:	DC 3.7V by battery
Operation Frequency:	2402~2480 MHz												
Modulation Type:	BT(1Mbps): GFSK BT EDR(2Mbps): $\pi/4$ -DQPSK BT EDR(3Mbps): 8DPSK												
Number Of Channel:	79CH												
Antenna Designation:	Dipole Antenna												
Antenna Gain(Peak):	1 dBi												
Power Rating:	DC 3.7V by battery												
Channel List	Refer to below												
Adapter	Power supply and ADP(rating): Input: AC 100-240V, 150mA, 50/60Hz Output: DC5.0V, 500mA												
Battery	Battery(rating): Rated Voltage: 3.7V Charge Limit: 4.2V Capacity: 1000mAh												
Hardware version number	K38-MB-V1.1												
Software version number	QMobile_E500i Music_20160920_V1.08												

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.	Channel	Frequency (MHz)
	00	2402
	01	2403
	02	2404

	39	2441
	40	2442
	41	2443

	77	2479
	78	2480

a) The type of modulation used by the equipment:

- FHSS
- other forms of modulation

b) In case of FHSS modulation:

- In case of non-Adaptive Frequency Hopping equipment:
The number of Hopping Frequencies:
- In case of Adaptive Frequency Hopping Equipment:
The maximum number of Hopping Frequencies: 79
The minimum number of Hopping Frequencies: 79
The Dwell Time:
The Minimum Channel Occupation Time:

c) Adaptive / non-adaptive equipment:

- non-adaptive Equipment
- adaptive Equipment without the possibility to switch to a non-adaptive mode
- adaptive Equipment which can also operate in a non-adaptive mode

d) In case of adaptive equipment:

- The Channel Occupancy Time implemented by the equipment:
- The equipment has implemented an LBT based DAA mechanism
- In case of equipment using modulation different from FHSS:
- The equipment is Frame Based equipment
- The equipment is Load Based equipment
- The equipment can switch dynamically between Frame Based and Load Based equipment
- The CCA time implemented by the equipment: μ s
- The value q as referred to in clause 4.3.2.5.2.2.2
- The equipment has implemented an non-LBT based DAA mechanism
- The equipment can operate in more than one adaptive mode

e) In case of non-adaptive Equipment:

- The maximum RF Output Power (e.i.r.p.): 3.46 dBm
- The maximum (corresponding) Duty Cycle: 45%
- Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared):

f) The worst case operational mode for each of the following tests:

- RF Output Power
GFSK
- Accumulated Transmit time, Frequency Occupation & Hopping Sequence (only for FHSS equipment)



- GFSK
- Hopping Frequency Separation (only for FHSS equipment)
GFSK
- Occupied Channel Bandwidth
GFSK
- Transmitter unwanted emissions in the OOB domain
GFSK
- Transmitter unwanted emissions in the spurious domain
GFSK
- Receiver spurious emissions
GFSK

g) The different transmit operating modes (tick all that apply):

- Operating mode 1: Single Antenna Equipment
 - Equipment with only 1 antenna
 - Equipment with 2 diversity antennas but only 1 antenna active at any moment in time
 - Smart Antenna Systems with 2 or more antennas, but operating in a (legacy) mode where only 1 antenna is used. (BT mode in smart antenna systems)
 - Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming
 - Single spatial stream / Standard throughput / (BT mode)
 - High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1
 - High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2
NOTE: Add more lines if more channel bandwidths are supported.
 - Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming
 - Single spatial stream / Standard throughput (BT mode)
 - High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1
 - High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2
NOTE: Add more lines if more channel bandwidths are supported.

h) In case of Smart Antenna Systems:

- The number of Receive chains:
- The number of Transmit chains:
 - symmetrical power distribution
 - asymmetrical power distribution
 In case of beam forming, the maximum beam forming gain:
 NOTE: Beam forming gain does not include the basic gain of a single antenna.

i) Operating Frequency Range(s) of the equipment:

- Operating Frequency Range 1: 2402 MHz to 2480 MHz
- Operating Frequency Range 2:
NOTE: Add more lines if more Frequency Ranges are supported.

j) Occupied Channel Bandwidth(s):

- Occupied Channel Bandwidth : 0.866 MHz
- Occupied Channel Bandwidth : 1.090 MHz
- NOTE: Add more lines if more channel bandwidths are supported.

k) Type of Equipment (stand-alone, combined, plug-in radio device, etc.):

- Stand-alone
- Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment)
- Plug-in radio device (Equipment intended for a variety of host systems)
- Other



l) The extreme operating conditions that apply to the equipment:

Operating temperature range: -10°C to 40°C

Operating voltage range: 3.3V to 4.2V ■DC

Details provided are for the:

- stand-alone equipment
- combined (or host) equipment
- test jig

m) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p levels:

• Antenna Type

■ Integral Antenna

Antenna Gain: 1 dBi

If applicable, additional beamforming gain (excluding basic antenna gain): dB

- Temporary RF connector provided
- No temporary RF connector provided
- Dedicated Antennas (equipment with antenna connector)
- Single power level with corresponding antenna(s)
- Multiple power settings and corresponding antenna(s)

Number of different Power Levels:

Power Level 1: dBm

Power Level 2: dBm

Power Level 3: dBm

NOTE 1: Add more lines in case the equipment has more power levels.

NOTE 2: These power levels are conducted power levels (at antenna connector).

- For each of the Power Levels, provide the intended antenna assemblies, their, corresponding gains (G) and the resulting e.i.r.p. levels also taking into account the beamforming gain (Y) if applicable

Power Level 1: dBm

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p.(dBm)	Part number or model name
1	1	3.46	E500i Music
2			
3			
4			

NOTE: Add more rows in case more antenna assemblies are supported for this power level.



Power Level 2: dBm

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p.(dBm)	Part number or model name
1			
2			
3			
4			

NOTE: Add more rows in case more antenna assemblies are supported for this power level.

Power Level 3: dBm

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p.(dBm)	Part number or model name
1			
2			
3			
4			

NOTE: Add more rows in case more antenna assemblies are supported for this power level.

n) The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:

Details provided are for the: stand-alone equipment

combined (or host) equipment

test jig Supply Voltage

AC mains State AC voltage 100-240 V

DC State DC voltage :3.7V

In case of DC, indicate the type of power source

Internal Power Supply

External Power Supply or AC/DC adapter

Battery: 3.7V

Other:

o) Describe the test modes available which can facilitate testing:

The EUT can entering Engineering Command by enter * #435763#

p) The equipment type (e.g. Bluetooth®, IEEE 802.11™ [i.3], proprietary, etc.):

BT



2.2 TEST CONDITIONS AND CHANNEL

	Normal Test Conditions	Extreme Test Conditions
Temperature	15°C - 35°C	-10°C - 40°C
Relative Humidity	20% - 75%	20% - 75%
Supply Voltage	DC 3.7V	DC 3.3V - DC 4.2V

Test Channel	EUT Channel	Test Frequency (MHz)
lowest	CH00	2402
middle	CH39	2441
highest	CH78	2480

Note:

- (1) The HT 40°C and LT -10°C was declare by manufacturer, The EUT couldn't be operate normally with higher or lower temperature.
- (2) The High Voltage 4.2V and Low Voltage 3.3V was declare by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.

2.3 DESCRIPTION OF TEST CONDITIONS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

E-1 EUT

The EUT was programmed to be in continuously transmitting mode.



2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-1	Mobile Phone	QMobile	E500i Music	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note
N/A	N/A	N/A	N/A	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” means “shielded” “with core”; “NO” means “unshielded” “without core”.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Spectrum Analyzer	Agilent	E4407B	MY50140340	2015.10.25	2016.10.24
Bilog Antenna	TESEQ	CBL6111D	34678	2015.11.25	2016.11.24
Horn Antenna	Schwarzbeck	BBHA 9120D(1201)	9120D-1343	2016.03.06	2017.03.05
USB RF power sensor	DARE	RPR3006W	15100041SNOO 3	2015.10.25	2016.10.24
USB RF power sensor	DARE	RPR3006W	15100041SNOO 4	2015.10.25	2016.10.24
PreAmplifier	Agilent	8449B	60538	2015.10.25	2016.10.24
Temperature & Humidity test chamber	GZGONGWEN	GDS-250	080821	2015.10.27	2016.10.26
Signal Generator	Agilent	N5182A	MY46240556	2015.11.18	2016.11.17
Signal Analyzer	Agilent	N9020A	MY49100060	2015.11.18	2016.11.17
Universal Radio communication tester	R&S	CMU200	112012	2015.10.25	2016.10.24
Attenuator	HP	8494B	DC-18G	2015.10.25	2016.10.24
DC Power source	Zhaoxin	RXN-605D	20140807176	N.C.R	N.C.R
AC Power Source	APC	KDF-11010G	F214050035	N.C.R	N.C.R
Router	TP-LINK	TL-WR885N	112507401073 5	N.C.R	N.C.R

3. RF OUTPUT POWER

3.1 APPLIED PROCEDURES / LIMIT

FHSS:

The maximum RF output power for adaptive Frequency Hopping equipment shall be equal to or less than 20 dBm. The maximum RF output power for non-adaptive Frequency Hopping equipment shall be declared by the supplier. See clause 5.3.1 m). The maximum RF output power for this equipment shall be equal to or less than the value declared by the supplier. This declared value shall be equal to or less than 20 dBm. This limit shall apply for any combination of power level and intended antenna assembly.

Other than FHSS:

For adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be 20 dBm. The maximum RF output power for non-adaptive equipment shall be declared by the supplier and shall not exceed 20 dBm. See clause 5.3.1 m). For non-adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be equal to or less than the value declared by the supplier.

This limit shall apply for any combination of power level and intended antenna assembly.

Limit
20 dBm

Between the start and stop times of each individual burst calculate the RMS power over the burst using the formula below. Save these P_{burst} values, as well as the start and stop times for each burst.

$$P_{burst} = \frac{1}{k} \sum_{n=1}^k P_{sample}(n)$$

with 'k' being the total number of samples and 'n' the actual sample number

3.2 TEST PROCEDURES

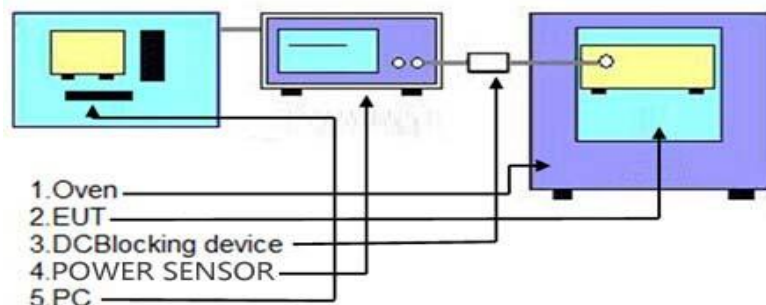
1. Please refer to ETSI EN 300 328 (V1.9.1) clause 5.3.2.1 for the test conditions.
2. Please refer to ETSI EN 300 328 (V1.9.1) clause 5.3.2.2.1 for the measurement method.

Use a fast power sensor suitable for 2,4 GHz and capable of 1 MS/s.

Use the following settings:

- a) - Sample speed 1 MS/s or faster.
- The samples must represent the power of the signal.
- Measurement duration: For non-adaptive equipment: equal to the observation period defined in b)
- b) clauses 4.3.1.2.1 or 4.3.2.3.1. For adaptive equipment, the measurement duration shall be long enough to ensure a minimum number of bursts (at least 10) are captured.
- c) Print the plots from power sensor by used power sensor on PC, select the max result and record it.

3.3 TEST SETUP LAYOUT






3.4 TEST RESULT

Modulation		GFSK				
Test conditions		Normal	Extreme			
			LTLV	LTHV	HTLV	HTHV
EIRP (dBm)	Hopping	3.40	3.38	3.46	3.36	3.39
	Max. output power	3.46				
Limits		20dBm (-10dBW)				
Burst plot		> 10				
T/on		0.25ms				
T/Off		1ms				
Result		Complies				

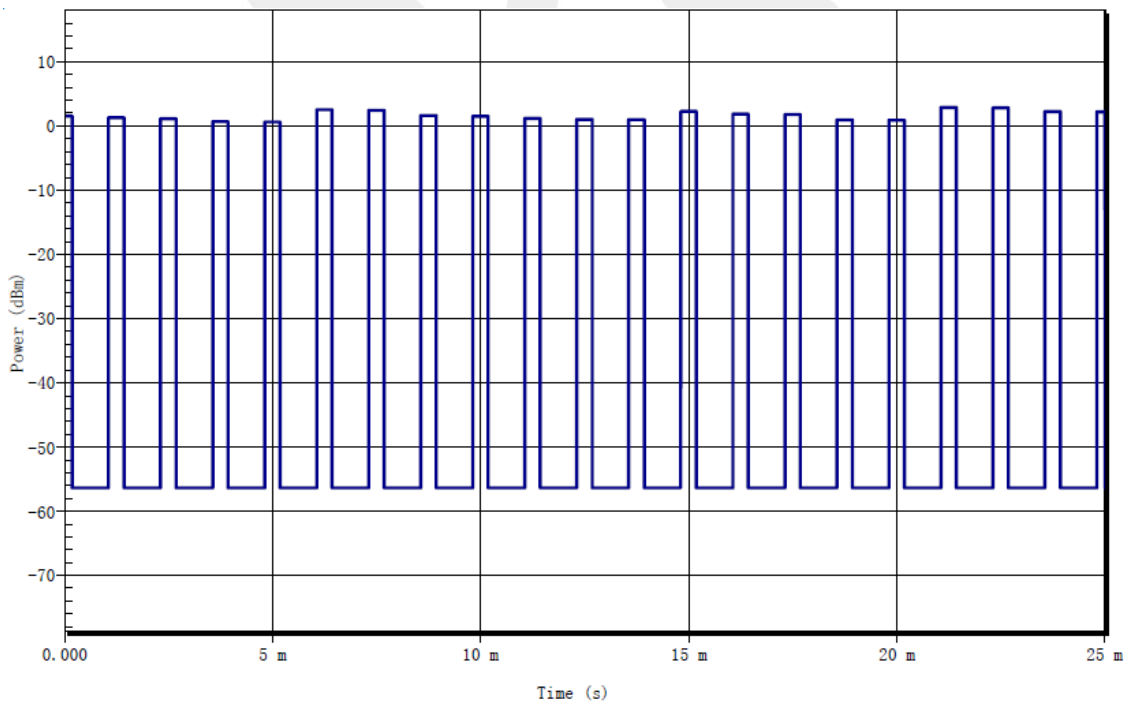
GFSK HOPPING





Modulation		$\pi/4$ -DQPSK				
Test conditions		Normal	Extreme			
			LTLV	LTHV	HTLV	HTHV
EIRP (dBm)	Hopping	2.90	2.86	2.93	2.87	2.91
	Max. output power	2.93				
Limit		$\leq 100\text{mW}$ (20dBm)				
Burst plot		> 10				
T/on		0.25ms				
T/Off		1ms				
Result		Complies				

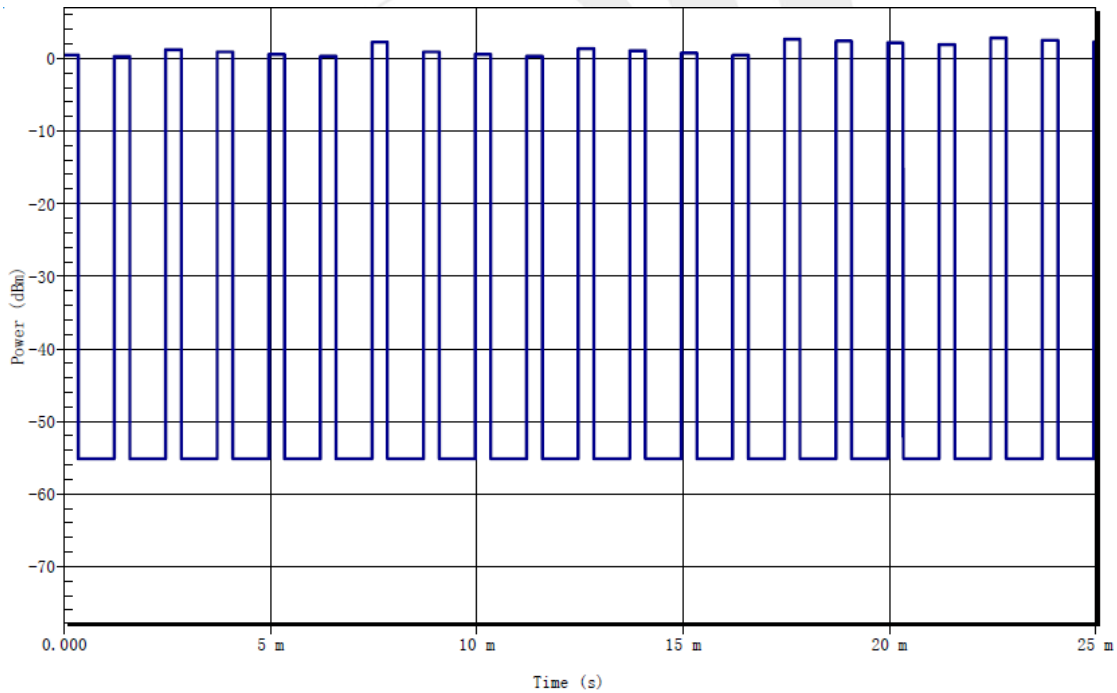
$\pi/4$ QPSK HOPPING





Modulation		8-DPSK				
Test conditions		Normal	Extreme			
			LTLV	LTHV	HTLV	HTHV
EIRP (dBm)	Hopping	2.70	2.68	2.75	2.66	2.69
	Max. output power	2.75				
Limit		≤100mW (20dBm)				
Burst plot		> 10				
T/on		0.25ms				
T/Off		1ms				
Result		Complies				

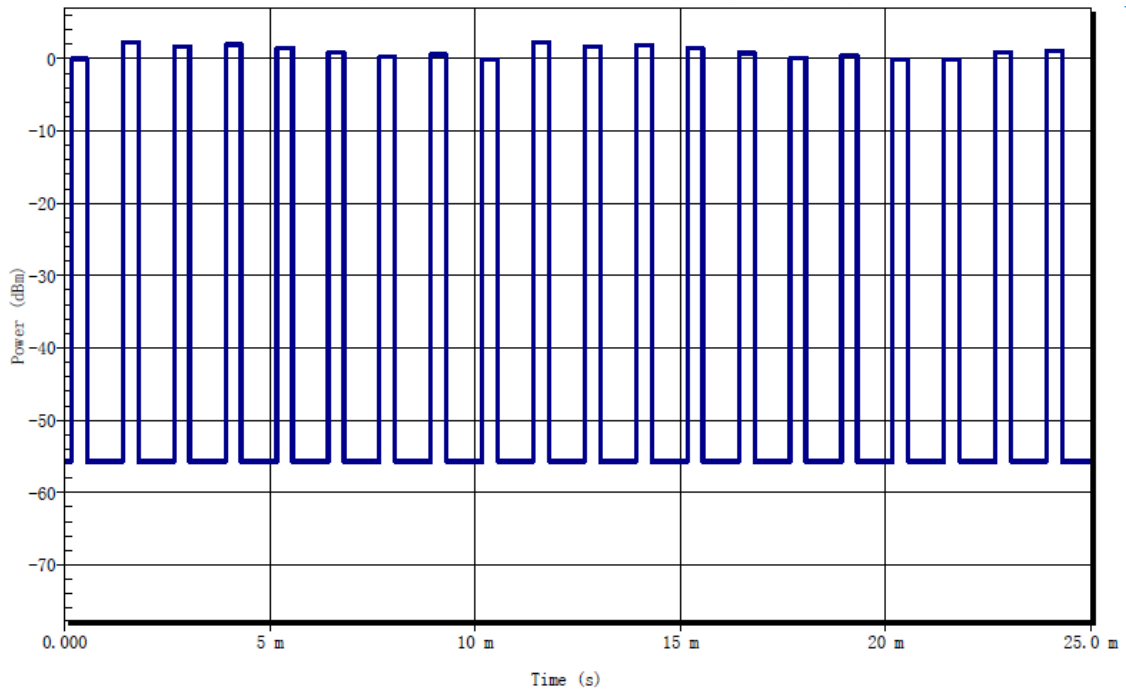8DPSK HOPPING





4. ACCUMULATED TRANSMIT TIME, FREQUENCY OCCUPATION & HOPPING SEQUENCE

4.1 APPLIED PROCEDURES / LIMIT

Non-adaptive frequency hopping systems

The Accumulated Transmit Time on any hopping frequency shall not be greater than 15 ms within any observation period of 15 ms multiplied by the minimum number of hopping frequencies (N) that have to be used.

Non-adaptive medical devices requiring reverse compatibility with other medical devices placed on the market that are compliant with version 1.7.1 or earlier versions of ETSI EN 300 328, are allowed to have an operating mode in which the maximum Accumulated Transmit Time is 400 ms within any observation period of 400 ms multiplied by the minimum number of hopping frequencies (N) that have to be used, only when communicating to these legacy devices already placed on the market. In order for the equipment to comply with the Frequency Occupation requirement, it shall meet either of the following two options:

Option 1: Each hopping frequency of the hopping sequence shall be occupied at least once within a period not exceeding four times the product of the dwell time and the number of hopping frequencies in use.

Option 2: The occupation probability for each frequency shall be between $((1 / U) \times 25 \%)$ and 77 % where U is the number of hopping frequencies in use.

The hopping sequence(s) shall contain at least N hopping frequencies where N is 15 or 15 divided by the minimum Hopping Frequency Separation in MHz, whichever is the greater.

Adaptive frequency hopping equipment

Adaptive Frequency Hopping equipment shall be capable of operating over a minimum of 70 % of the band specified in clause 1.

The Accumulated Transmit Time on any hopping frequency shall not be greater than 400 ms within any observation period of 400 ms multiplied by the minimum number of hopping frequencies (N) that have to be used. In order for the equipment to comply with the Frequency Occupation requirement, it shall meet either of the following two options:

Option 1: Each hopping frequency of the hopping sequence shall be occupied at least once within a period not exceeding four times the product of the dwell time and the number of hopping frequencies in use.

Option 2: The occupation probability for each frequency shall be between $((1 / U) \times 25 \%)$ and 77 % where U is the number of hopping frequencies in use.

The hopping sequence(s) shall contain at least N hopping frequencies at all times, where N is 15 or 15 divided by the minimum Hopping Frequency Separation in MHz, whichever is the greater.



Other Requirements

For non-Adaptive Frequency Hopping equipment, from the N hopping frequencies defined in clause 4.3.1.4.3.1 above, the equipment shall transmit on at least one hopping frequency while other hopping frequencies are blacklisted. For equipment that blacklists one or more hopping frequencies, these blacklisted frequencies are considered as active transmitting for the calculation of the MU factor of the equipment. See also clause 5.3.2.2.1.3 step 3, second bullet item and clause 5.3.2.2.1.4 step 3, note 2. For Adaptive Frequency Hopping equipment, from the N hopping frequencies defined in clause 4.3.1.4.3.2 above, the equipment shall consider at least one hopping frequency for its transmissions. Providing that there is no interference present on this frequency with a level above the detection threshold defined in clause 4.3.1.7.2.2 point 5 or clause 4.3.1.7.3.2 point 5, then the equipment shall have transmissions on this frequency. For non-Adaptive Frequency Hopping equipment, when not transmitting on a hopping frequency, the equipment has to occupy that frequency for the duration of the typical dwell time (see also definition for blacklisted frequency in clause 3.1).

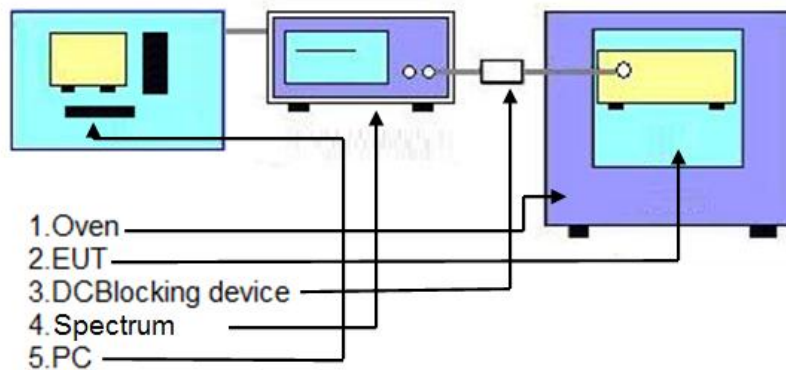
For Adaptive Frequency Hopping equipment using LBT based DAA, if a signal is detected during the CCA, the equipment may jump immediately to the next frequency in the hopping sequence (see clause 4.3.1.7.2.2 point 2) provided the limit for maximum dwell is respected.



4.2 TEST PROCEDURE

1. Please refer to ETSI EN 300 328 (V1.9.1) clause 5.3.4.1 for the test conditions.
2. Please refer to ETSI EN 300 328 (V1.9.1) clause 5.3.4.2 for the measurement method.
 - a) Set EUT work in hopping mode;
 - b) Centre Frequency: Equal to the hopping frequency being investigated
 - c) Frequency Span: 0 Hz
 - d) RBW: ~ 50 % of the Occupied Channel Bandwidth (433K for 1M, 545K for 3M)
 - e) VBW: \geq RBW (433KHz for 1M, 545KHz for 3M)
 - f) Detector Mode: RMS
 - g) Sweep time: Equal to the applicable observation period (see clause 4.3.1.3.2)
 - h) Number of sweep points: 30000
 - j) Trace mode: Clear / Write
 - k) Trigger: Free Run

4.3 TEST SETUP





4.4 TEST RESULT

GFSK

Dwell Time: N/A for Modulation Technology other than FHSS

Data Packet	Frequency	Pulse Duration	Dwell Time	Limits
		(ms)	(s)	(ms)
DH1	2441	0.370	0.118	400
DH3	2441	1.630	0.262	400
DH5	2441	2.880	0.307	400

Minimum Frequency Occupation Time Result:

N/A for Modulation Technology other than FHSS

Mode	Channel	Minimum Frequency occupation Time(ms)
DH1	2441	348.12
DH3	2441	1199.00
DH5	2441	2388.37

Note: Sweep time: 4 × Dwell Time × Actual number of hopping frequencies in use

Hopping sequence: N/A for Modulation Technology other than FHSS

20dB BW(MHz)	Limit
79.55	
Hopping Sequence(%)	>70 %
95.27%	

Remark:

1. For adaptive systems, using the lowest and highest -20 dB points from the total spectrum envelope, it shall be verified whether the system uses 70 % of the band specified.
2. $\text{Hopping Sequence}(\%) = (20\text{dB BW}/83.5) \times 100$

**8DPSK**

Dwell Time: N/A for Modulation Technology other than FHSS

Data Packet	Frequency	Pulse Duration	Dwell Time	Limits
		(ms)	(s)	(ms)
3DH1	2441	0.380	0.122	400
3DH3	2441	1.630	0.262	400
3DH5	2441	2.890	0.307	400

Minimum Frequency Occupation Time Result:

N/A for Modulation Technology other than FHSS

Mode	Channel	Minimum Frequency occupation Time(ms)
3DH1	2441	346.67
3DH3	2441	1198.28
3DH5	2441	2388.73

Note: Sweep time: 4 × Dwell Time × Actual number of hopping frequencies in use

Hopping sequence: N/A for Modulation Technology other than FHSS

20dB BW(MHz)	Limit
79.88	
Hopping Sequence(%)	>70%
95.66%	

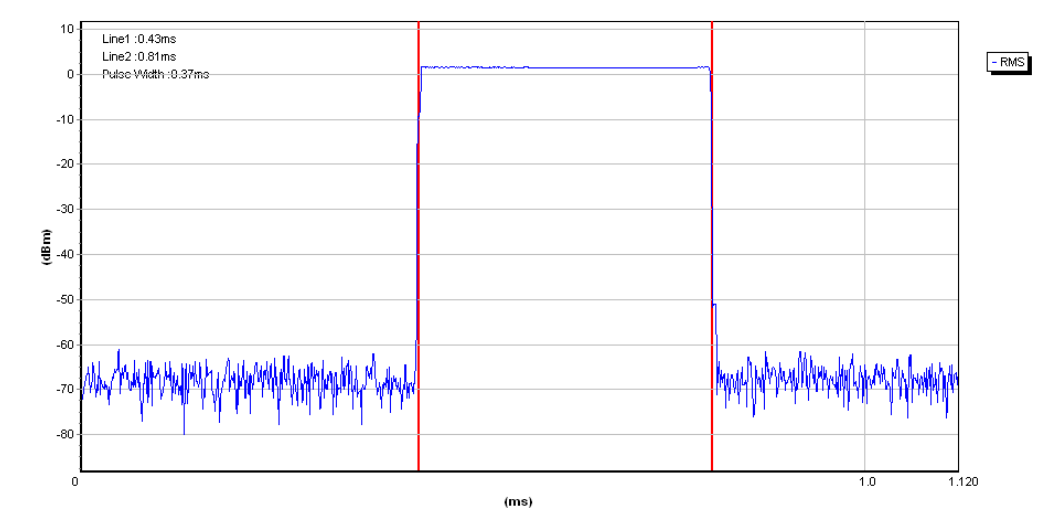
Remark:

1. For adaptive systems, using the lowest and highest -20 dB points from the total spectrum envelope, it shall be verified whether the system uses 70% of the band specified.
2. Hopping Sequence(%) = (20dB BW/83.5)*100




Test Plot


GFSK DH1



DH3

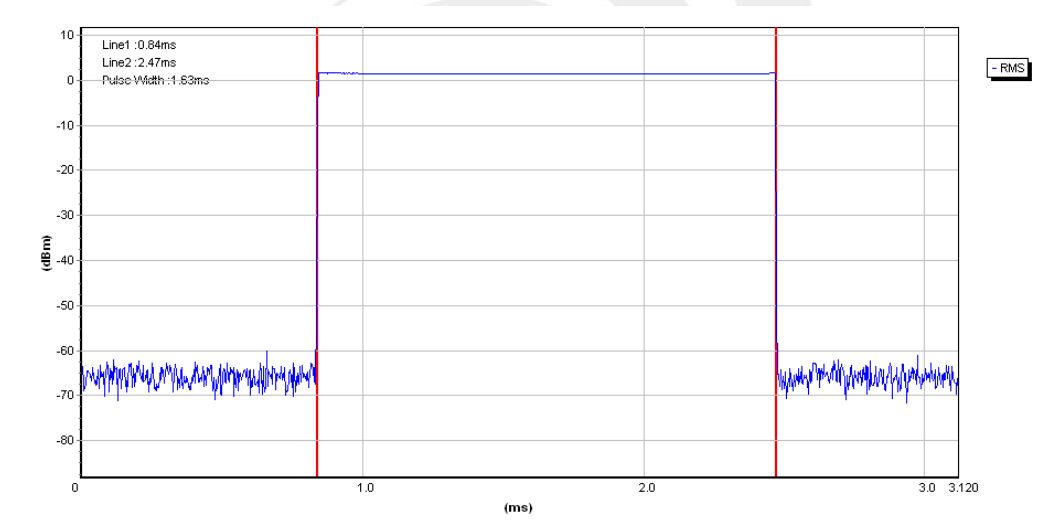


DH5

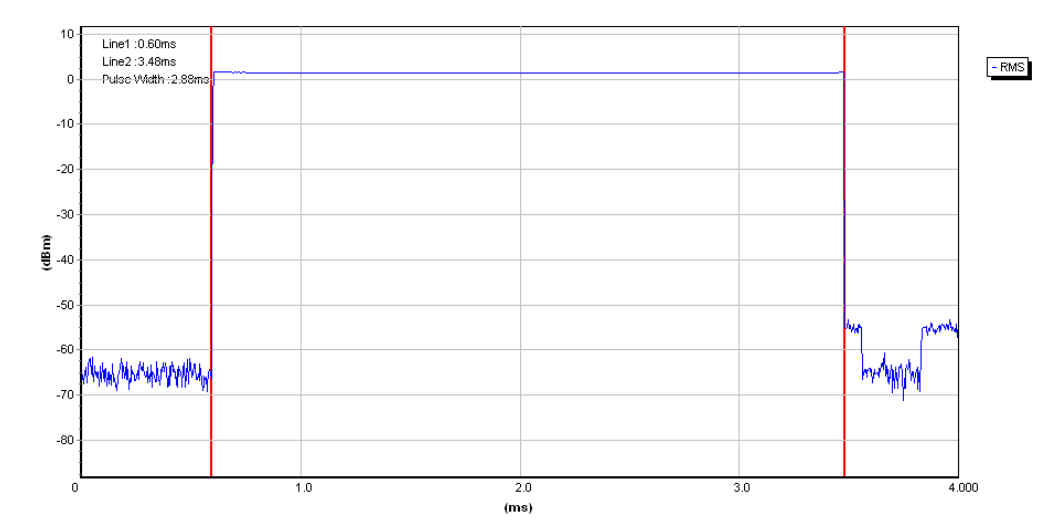




Test Plot

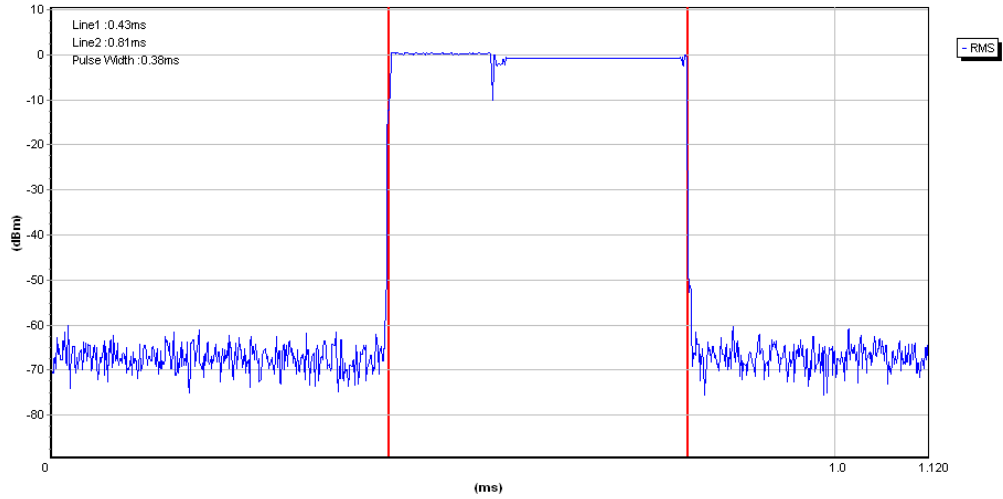
8DPSK 3DH1



3DH3

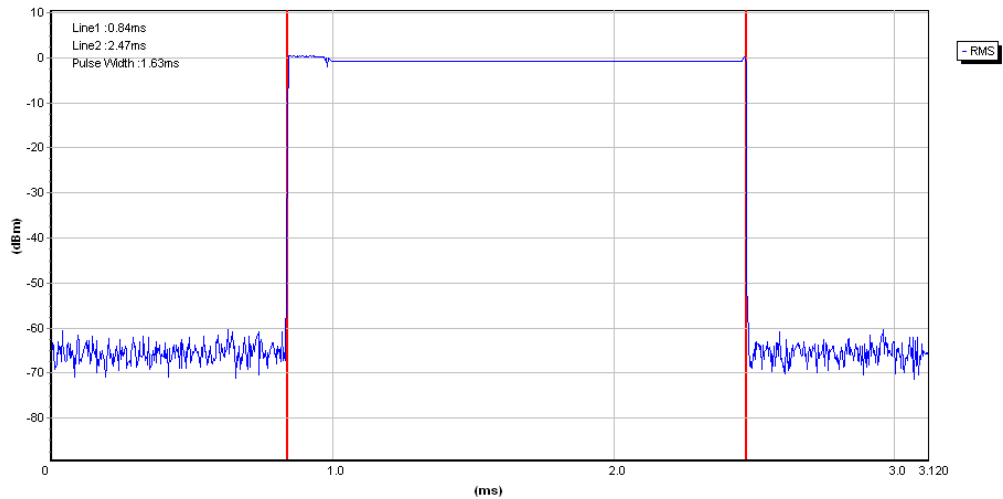

3DH5

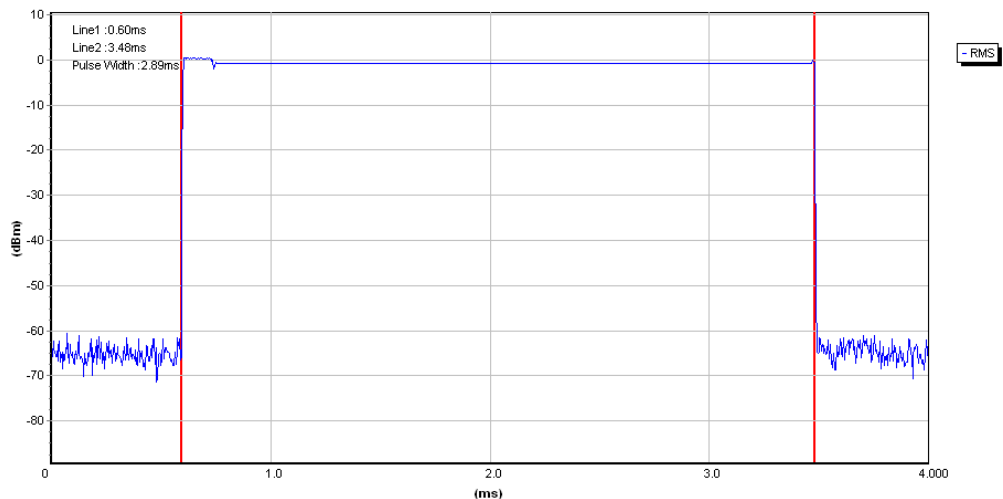

5. HOPPING FREQUENCY SEPARATION

5.1 APPLIED PROCEDURES / LIMIT

Non-adaptive frequency hopping systems

For non-adaptive Frequency Hopping equipment, the Hopping Frequency Separation shall be equal or greater than the Occupied Channel Bandwidth (see clause 4.3.1.8), with a minimum separation of 100 kHz.

- a. For equipment with a maximum declared RF Output power level of less than 10 dBm e.i.r.p. or for non-adaptive Frequency Hopping equipment operating in a mode where the RF Output power is less than 10 dBm e.i.r.p. only the minimum Hopping Frequency Separation of 100 kHz applies.

Adaptive frequency hopping systems

For adaptive Frequency Hopping equipment, the minimum Hopping Frequency Separation shall be 100 kHz.

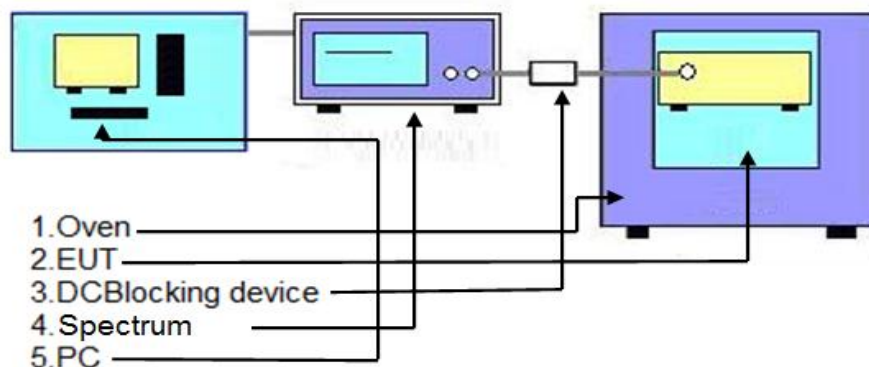
- b. Adaptive Frequency Hopping equipment, which for one or more hopping frequencies, has switched to a non-adaptive mode because interference was detected on all these hopping positions with a level above the threshold level defined in clause 4.3.1.7.2.2 or clause 4.3.1.7.3.2, is allowed to continue to operate with a minimum Hopping Frequency Separation of 100 kHz on these hopping frequencies as long as the interference is present on these frequencies. The equipment shall continue to operate in an adaptive mode on other hopping frequencies.

Adaptive Frequency Hopping equipment which decided to operate in a non-adaptive mode on one or more hopping frequencies without the presence of interference, shall comply with the limit in clause 4.3.1.5.3.1 for these hopping frequencies as well as with all other requirements applicable to non-adaptive frequency hopping equipment.

5.2 TEST PROCEDURE

- a. Please refer to ETSI EN 300 328 (V1.9.1) clause 5.3.5 for the test conditions.
- b. Please refer to ETSI EN 300 328 (V1.9.1) clause 5.3.5.2 for the measurement method.
 - Centre Frequency: Centre of the two adjacent hopping frequencies
 - Frequency Span: Sufficient to see the complete power envelope of both hopping frequencies
 - RBW: 1 % of the Span
 - RBW: 30K
 - VBW:100K
 - Detector Mode: RMS
 - Trace Mode: Max Hold
 - Sweep time: 1S

5.3 TEST SETUP





5.4 TEST RESULT

GFSK

Frequency	Ch. Separation (MHz)	Limit (kHz)	Result
2402.000MHz	1.01	>100	Complies
2441.000MHz	1.01	>100	Complies
2480.000 MHz	1.01	>100	Complies


 $\pi/4$ -QPSK

Frequency	Ch. Separation (MHz)	Limit (kHz)	Result
2402.000MHz	1.01	>100	Complies
2441.000MHz	1.00	>100	Complies
2480.000 MHz	1.02	>100	Complies

8DPSK

Frequency	Ch. Separation (MHz)	Limit (kHz)	Result
2402.000MHz	1.03	>100	Complies
2441.000MHz	1.03	>100	Complies
2480.000 MHz	1.01	>100	Complies

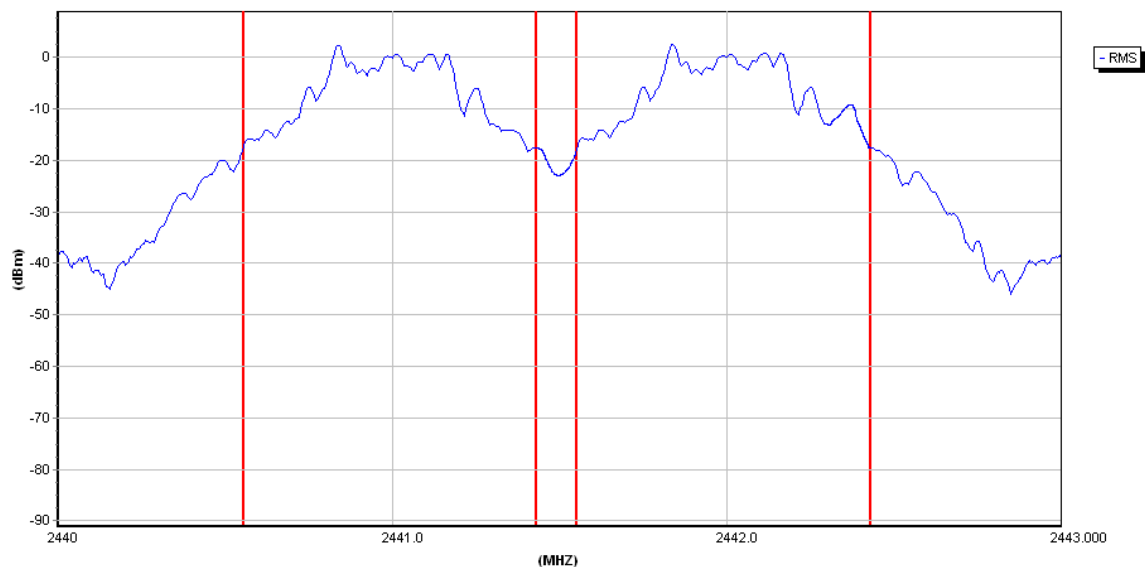Min Separation



6. OCCUPIED CHANNEL BANDWIDTH

6.1 APPLIED PROCEDURES / LIMIT

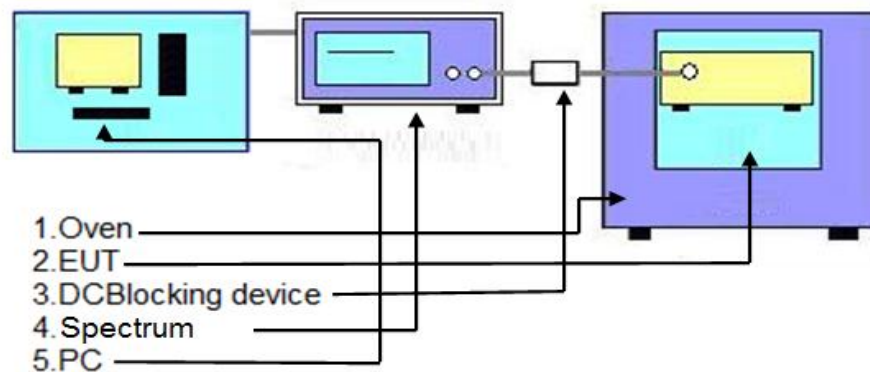
The Occupied Channel Bandwidth for each hopping frequency shall fall completely within the band given in clause 1.

For non-adaptive Frequency Hopping equipment with e.i.r.p greater than 10 dBm, the Occupied Channel Bandwidth for every occupied hopping frequency shall be equal to or less than the Nominal Channel Bandwidth declared by the supplier. See clause 5.3.1 j). This declared value shall not be greater than 5 MHz.

6.2 TEST PROCEDURES

1. Please refer to ETSI EN 300 328 (V1.9.1) clause 5.3.8 for the test conditions.
2. Please refer to ETSI EN 300 328 (V1.9.1) clause 5.3.8.1 for the measurement method.
 - Centre Frequency: The centre frequency of the channel under test
 - Resolution BW: ~ 1 % of the span without going below 1 %
 - RBW: 30K
VBW: 100K
 - Frequency Span for frequency hopping equipment: Lowest frequency separation that is used within the hopping sequence)
 - Frequency Span for other types of equipment: 2 × Nominal Channel Bandwidth (e.g. 2 MHz for a 1 MHz channel)
 - Detector Mode: RMS
 - Trace Mode: Max Hold
 - Sweep time:1S

6.3 TEST SETUP LAYOUT






6.4 TEST RESULT

OCCUPIED CHANNEL BANDWIDTH					
Test mode	CH	Frequency MHz	Bandwidth MHz	Limit	
				MHz	
GFSK	CH00	2402	0.866	>2400.0 <2483.5	
	CH78	2480	0.855		
Π/4QPSK	CH00	2402	1.163		
	CH78	2480	1.163		
8DPSK	CH00	2402	1.090		
	CH78	2480	1.089		
Test Result	PASS				


Note: FL is the lowest frequency of the 99% occupied bandwidth of power envelope.
FL is the lowest frequency of the 99% occupied bandwidth of power envelope.



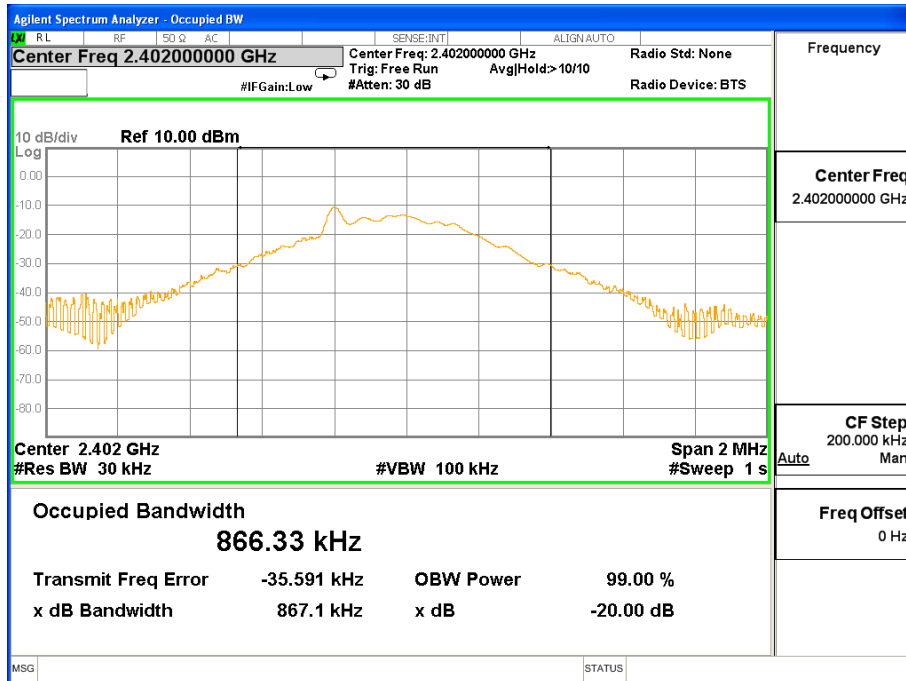1Mbps CH00




1Mbps CH78

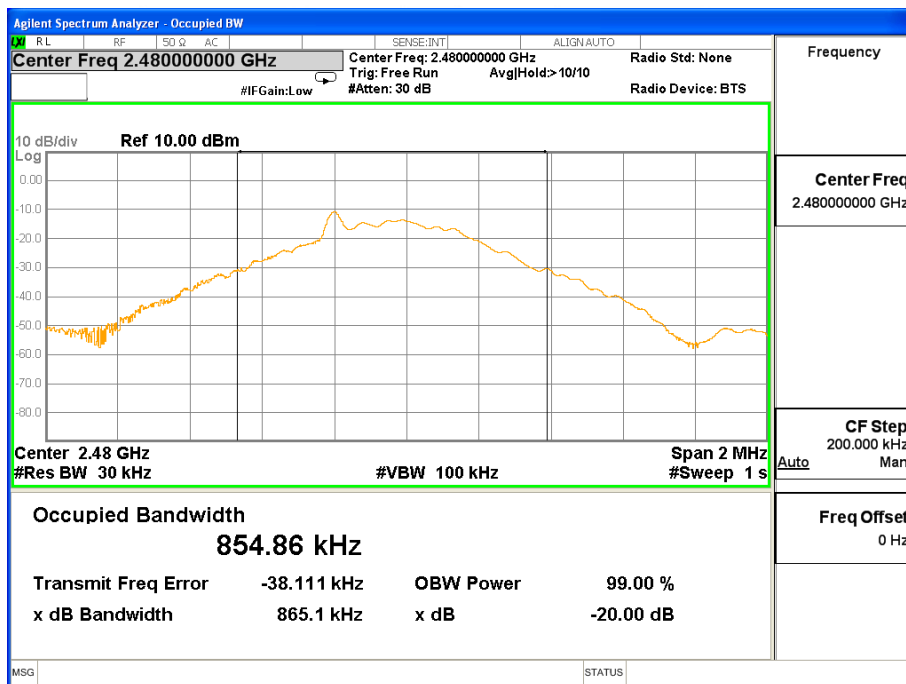




2Mbps CH00

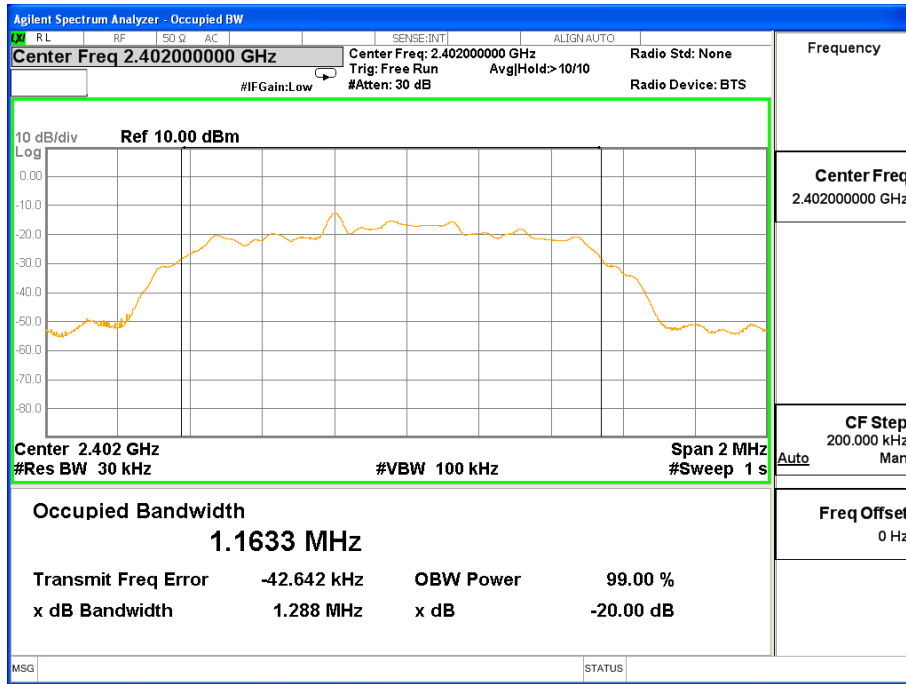


2Mbps CH78

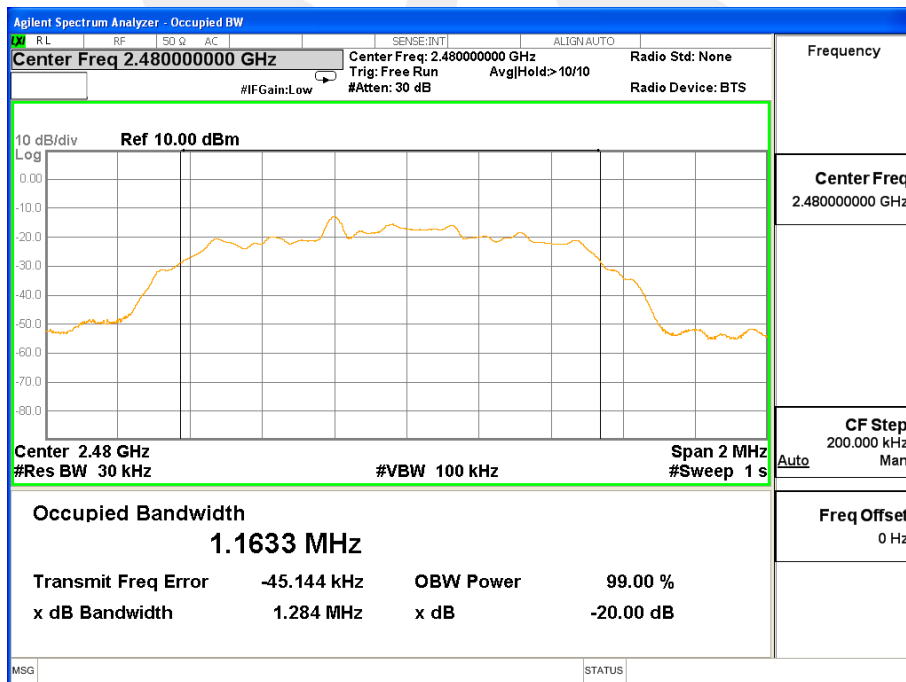




3Mbps CH00

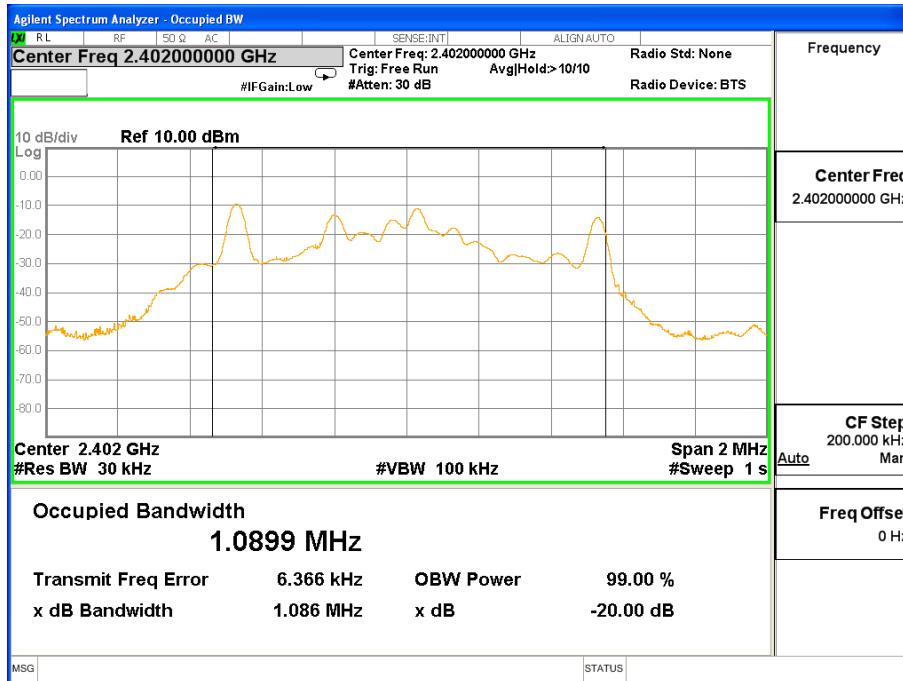

3Mbps CH78

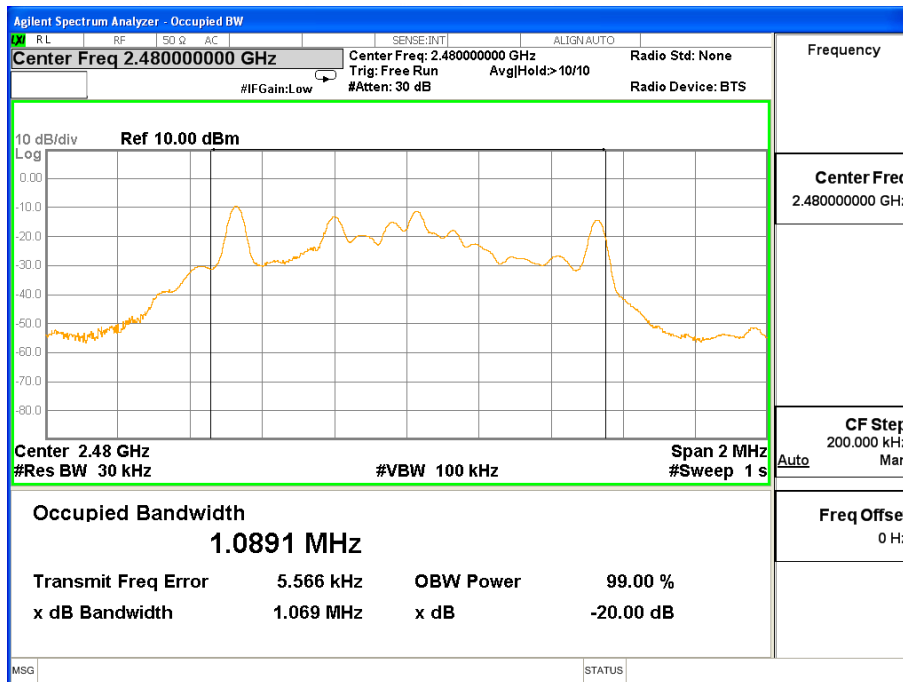

7. TRANSMITTER UNWANTED EMISSIONS IN THE OOB DOMAIN

7.1 APPLIED PROCEDURES / LIMIT

Clause	Frequency	Limit
4.3.1.9	2400-BW~2400 2483.5~2483.5+BW	-10dBm/MHz
	2400-2BW~2400-BW 2483.5+BW~2483.5+2BW	-20dBm/MHz
	<2400-2BW >2483.5+2BW	-30dBm/MHz

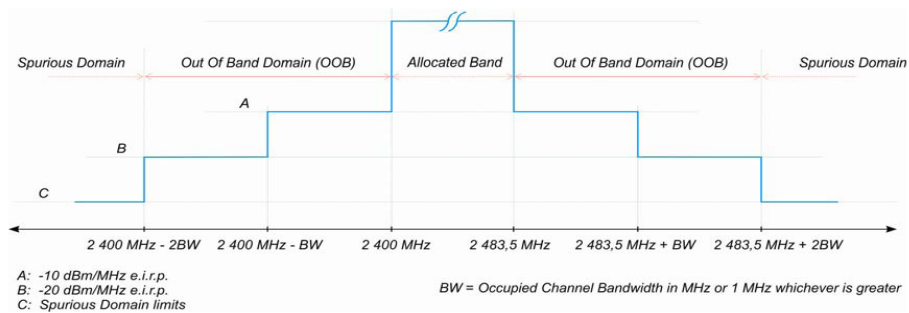


Figure 1: Transmit mask

7.2 MEASURING INSTRUMENTS AND SETTING

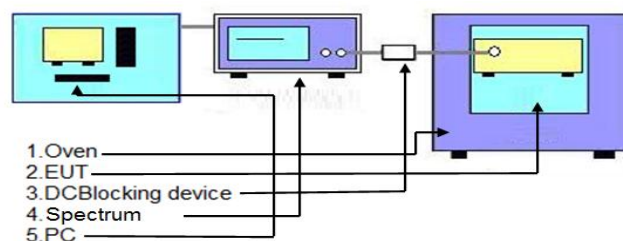
Please refer to ETSI EN 300 328 (V1.9.1) clause 5.3.9.2 for the measurement method.

For systems using FHSS modulation, the measurements shall be performed during normal operation (hopping).

• Connect the UUT to the spectrum analyser and use the following settings:

- Centre Frequency: 2 484 MHz
- Span: 0 Hz
- Resolution BW: 1 MHz
- Filter mode: Channel filter
- Video BW: 3 MHz
- Detector Mode: RMS
- Trace Mode: Max Hold
- Sweep Mode: Continuous
- Sweep Points: Sweep Time [s] / (1 μs) or 5 000 whichever is greater
- Trigger Mode: Video trigger
- Sweep Time: > 120 % of the duration of the longest burst detected during the measurement of the RF Output Power

7.3 TEST SETUP LAYOUT





7.4 TEST RESULT

GFSK

		Low		High	
Test Condition		OOB EMISSION(MHz)		OOB EMISSION(MHz)	
		Segment A	Segment B	Segment A	Segment B
		maximum power	maximum power	maximum power	maximum power
		dBm/MHz)	dBm/MHz)	dBm/MHz)	dBm/MHz)
Tnom °C	Vnom(v)	-30.34	-33.62	-49.67	-51.12
Limit (dBm)		-10.00	-20.00	-10.00	-20.00
PASS/FAIL		PASS	PASS	PASS	PASS

Π/4QPSK

		Low		High	
Test Condition		OOB EMISSION(MHz)		OOB EMISSION(MHz)	
		Segment A	Segment B	Segment A	Segment B
		maximum power	maximum power	maximum power	maximum power
		dBm/MHz)	dBm/MHz)	dBm/MHz)	dBm/MHz)
Tnom °C	Vnom(v)	-30.78	-37.27	-49.92	-54.00
Limit (dBm)		-10.00	-20.00	-10.00	-20.00
PASS/FAIL		PASS	PASS	PASS	PASS


8DPSK

		Low		High	
Test Condition		OOB EMISSION(MHz)		OOB EMISSION(MHz)	
		Segment A	Segment B	Segment A	Segment B
		maximum power	maximum power	maximum power	maximum power
		dBm/MHz)	dBm/MHz)	dBm/MHz)	dBm/MHz)
Tnom °C	Vnom(v)	-30.43	-36.13	-50.00	-53.06
Limit (dBm)		-10.00	-20.00	-10.00	-20.00
PASS/FAIL		PASS	PASS	PASS	PASS




Test Plot(Worst Mode)

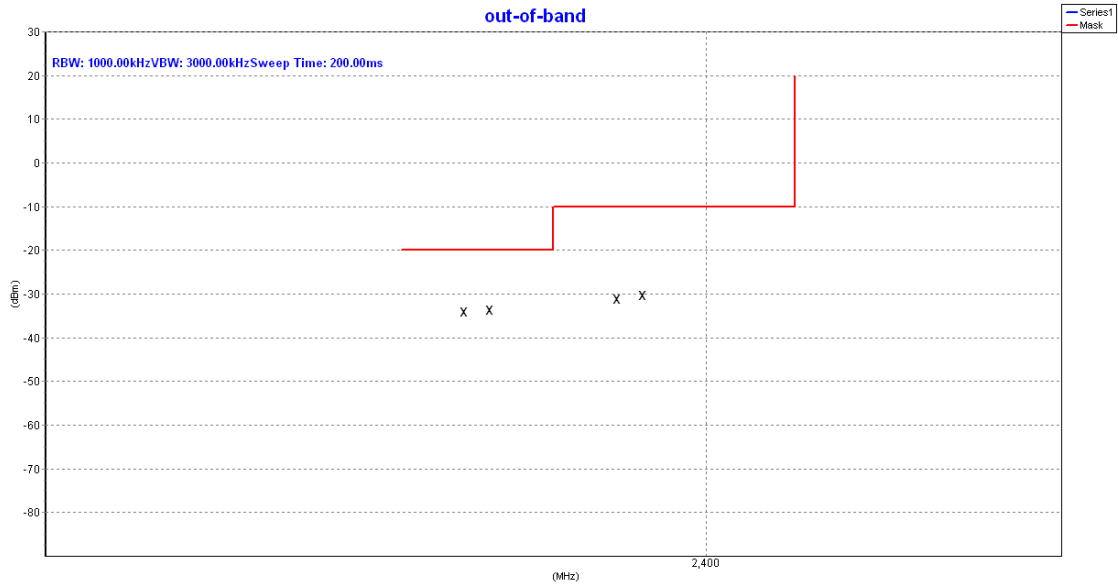1M Low




1M High

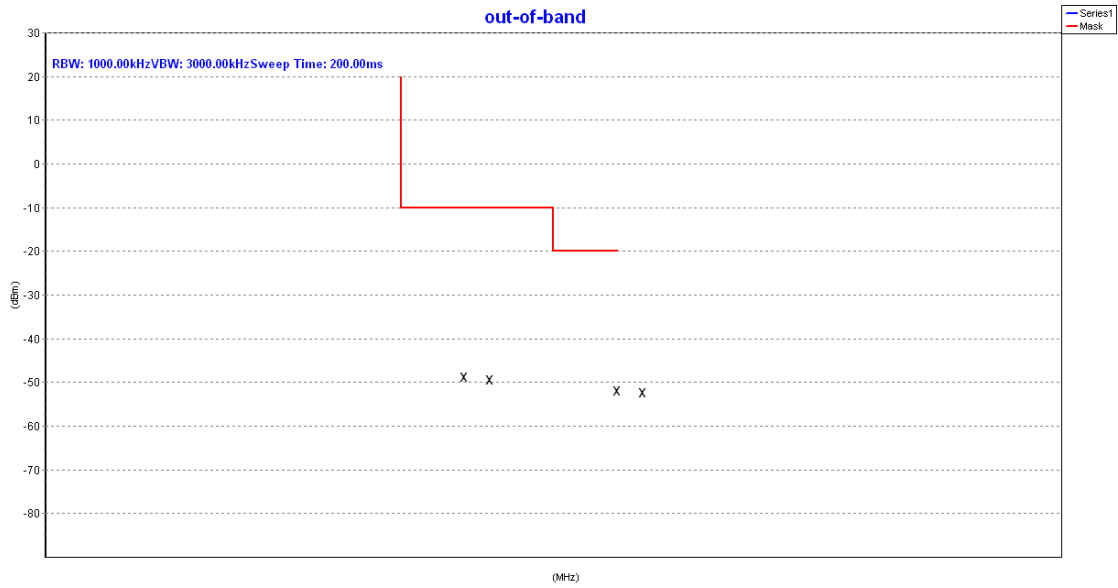




Test Plot(Worst Mode)

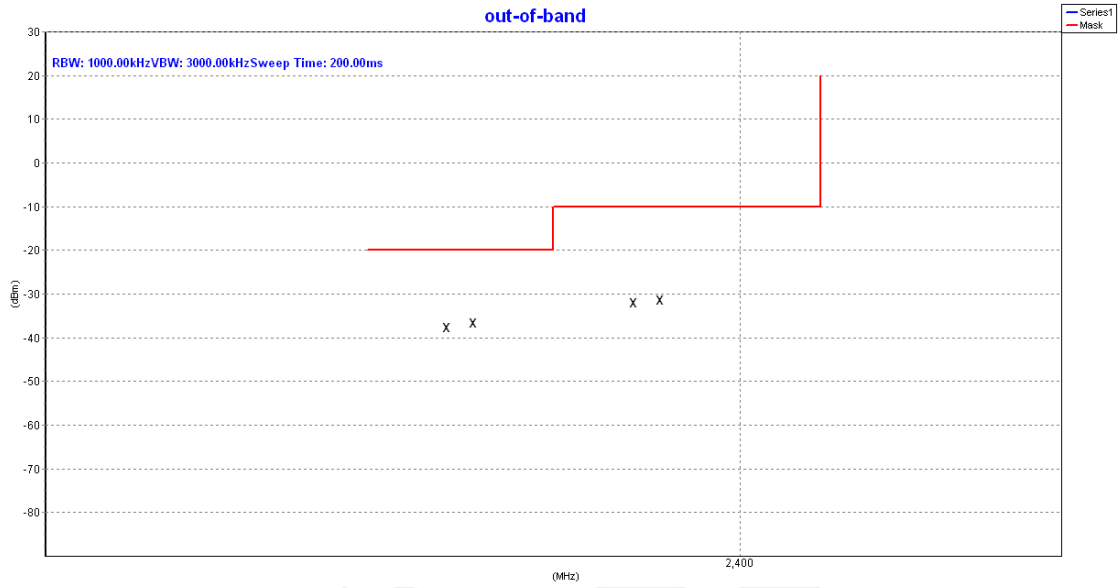2M Low




2M High

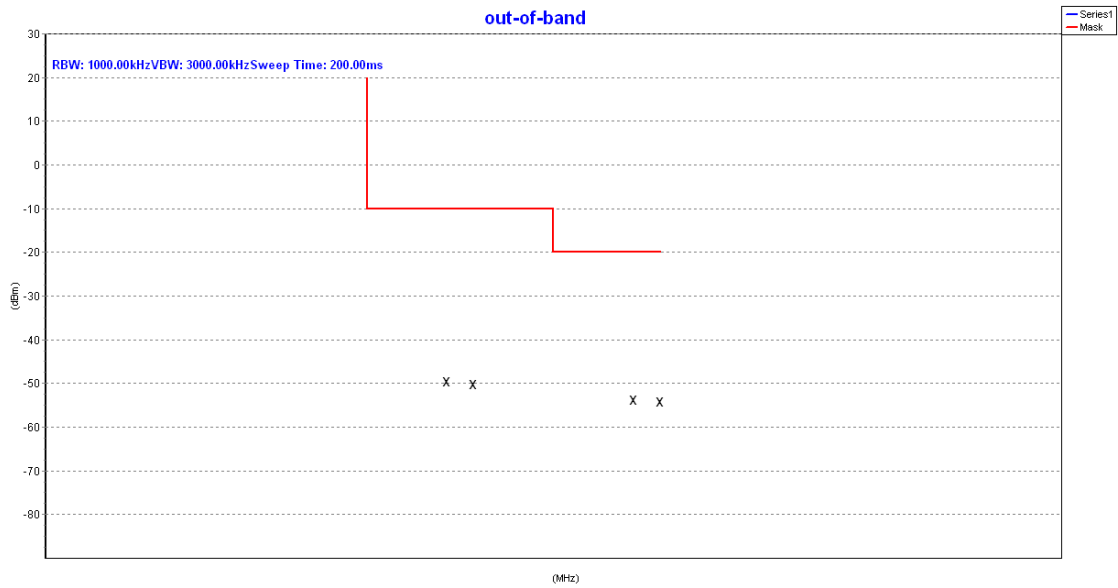




Test Plot(Worst Mode)

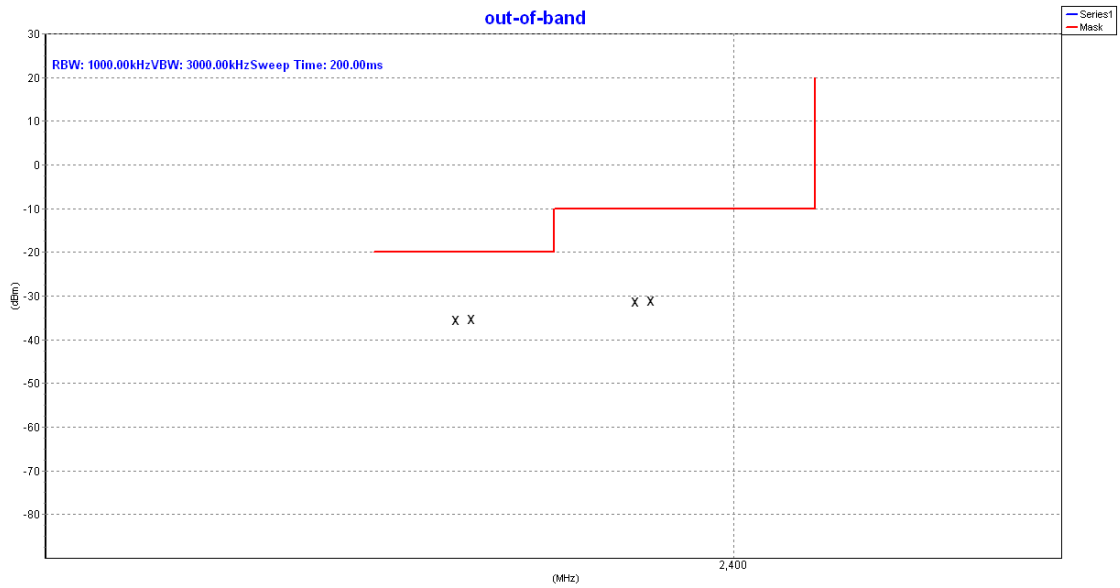3M Low



3M High

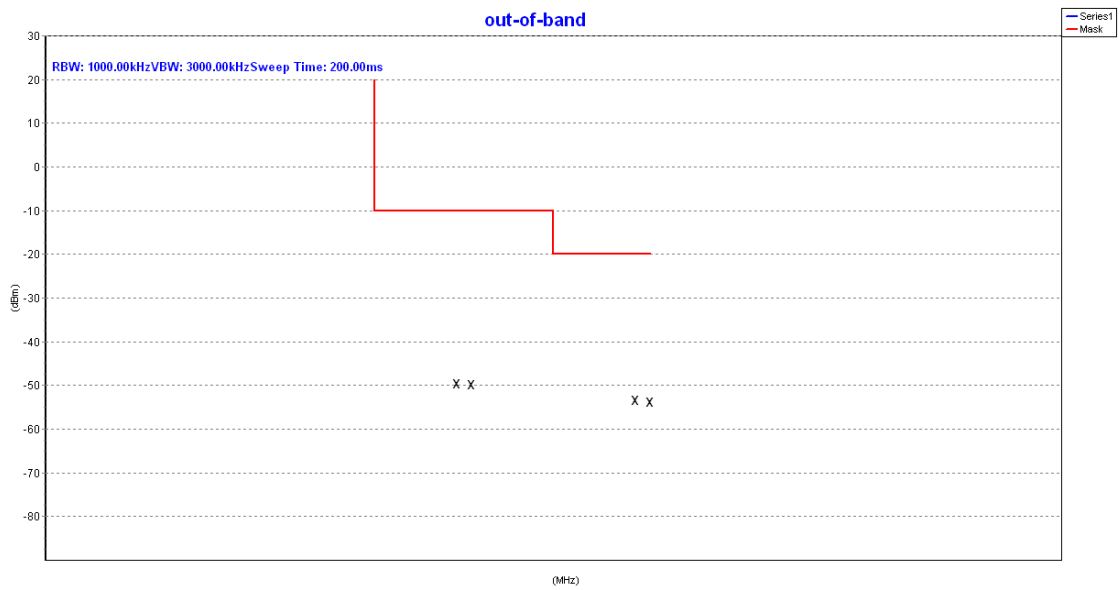

8. SPURIOUS EMISSIONS – TRANSMITTER

8.1 APPLIED PROCEDURES / LIMIT

Frequency range	Maximum power, e.r.p(≤1 GHz) e.i.r.p(> 1 GHz)	Bandwidth
30 MHz to 47 MHz	-36 dBm	100 KHz
47 MHz to 74 MHz	-54 dBm	100 KHz
74 MHz to 87.5 MHz	-36 dBm	100 KHz
87.5 MHz to 118 MHz	-54 dBm	100 KHz
118 MHz to 174 MHz	-36 dBm	100 KHz
174 MHz to 230 MHz	-54 dBm	100 KHz
230 MHz to 470 MHz	-36 dBm	100 KHz
470 MHz to 862 MHz	-54 dBm	100 KHz
862 MHz to 1 GHz	-36 dBm	100 KHz
1 GHz to 12.75 GHz	-30 dBm	1 MHz

8.2 MEASURING INSTRUMENTS AND SETTING

Please refer to refer to ETSI EN 300 328 (V1.9.1) clause 4.3.1.10&5.3.10. The following table is the setting of the Spectrum Analyzer.

Spectrum Analyzer	Setting
Frequency Start to Stop	30 MHz to 1 000 MHz
Resolution bandwidth / Video bandwidth	100 kHz / 300 kHz
Filter type:	3 dB (Gaussian)
Detector mode	Peak
Trace Mode	Max Hold
Sweep Points	≥ 19 400 (Set as 20 000)


Spectrum Analyzer	Setting
Frequency Start to Stop	1000 MHz to 12750MHz
Resolution bandwidth / Video bandwidth	1 MHz / 3 MHz
Filter type:	3 dB (Gaussian)
Detector mode	Peak
Trace Mode	Max Hold
Sweep Points	≥ 23 500 (Set as 24 000)

8.3 TEST PROCEDURES


- a. The EUT was placed on the top of the turntable in open test site area.
- b. The test shall be made in the transmitting mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- c. This measurement shall be repeated with the transmitter in standby mode where applicable.
- d. For 30~1000MHz spurious emissions measurement, the broad band bi-log receiving antenna was placed 3 meters far away from the turntable.
- e. The broadband receiving antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization. Each recorded suspected value is indicated as Read Level (Raw).
- f. Replace the EUT by standard antenna and feed the RF port by signal generator.
- g. Adjust the frequency of the signal generator to the suspected emission and slightly rotate the turntable to locate the position with maximum reading.
- h. Adjust the power level of the signal generator to reach the same reading with Read Level (Raw).
- i. The level of the spurious emission is the power level of (8) plus the gain of the standard antenna in dBi and minus the loss of the cable used between the signal generator and the standard antenna.
- j. If the level calculated in (9) is higher than limit by more than 6dB, then lower the RBW of the spectrum analyzer to 30KHz. If the level of this emission does not change by more than 2dB, then it is taken as narrowband emission, otherwise, wideband emission.
- k. The measurement shall be repeated at the lowest and the highest channel of the stated frequency range.
- l. EUT Orthogonal Axis:
"X" - denotes Laid on Table; "Y" - denotes Vertical Stand; "Z" - denotes Side Stand.

8.4 TEST SETUP LAYOUT

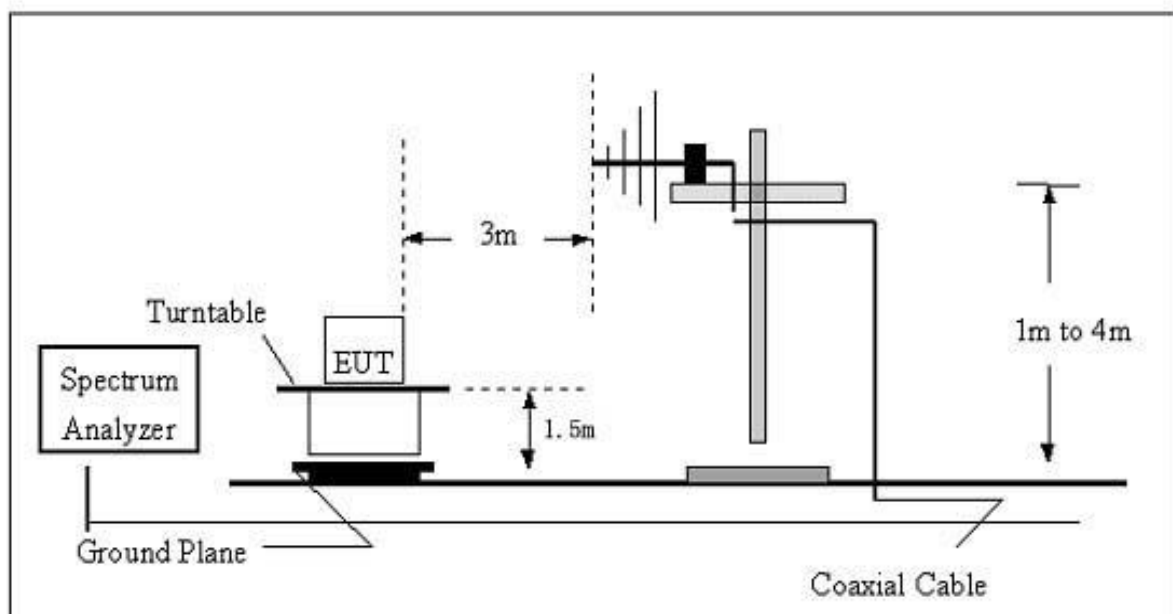(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz



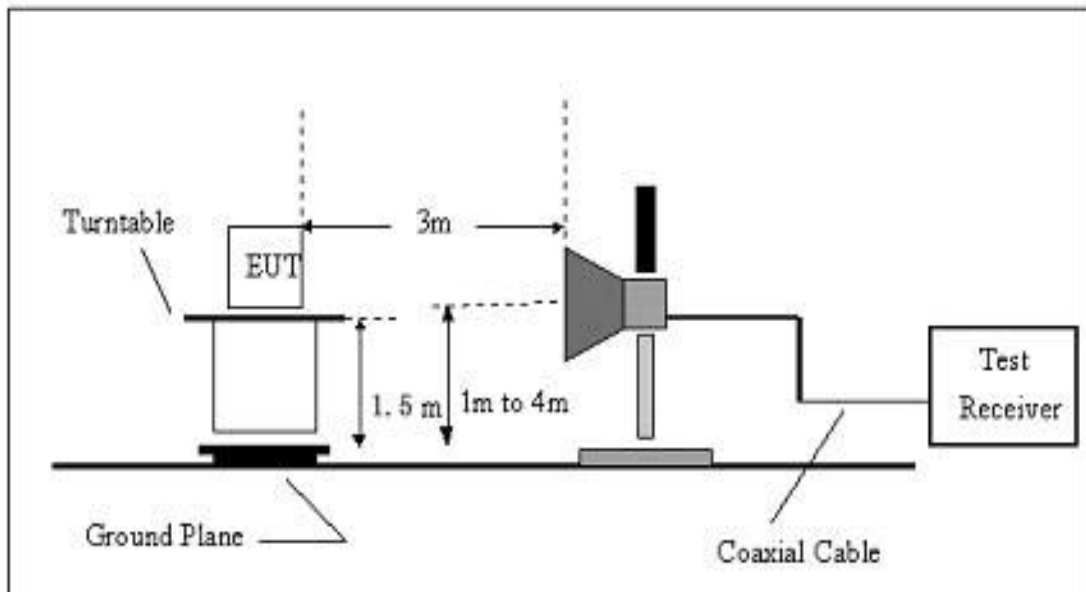(B) Radiated Emission Test Set-Up Frequency Above 1 GHz



8.5 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.

For the initial investigation on the highest, middle, lowest frequency, no significant differences in spurious emissions were observed between these 3 modes. The worst test data was shown:



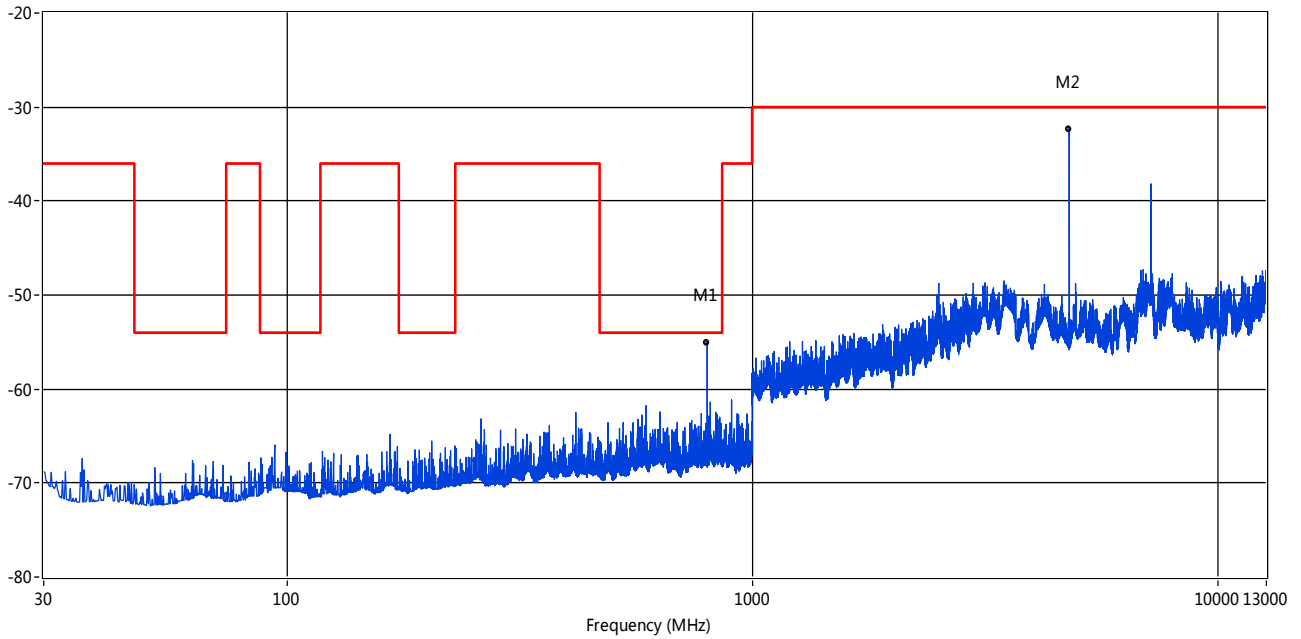
8.6 TEST RESULT (30MHz ~ 12750MHz)

Radiated Emissions:

TX GFSK/2402MHz


Horizontal

EN_RSE_300 328_TX_30-12.75GHz



Vertical

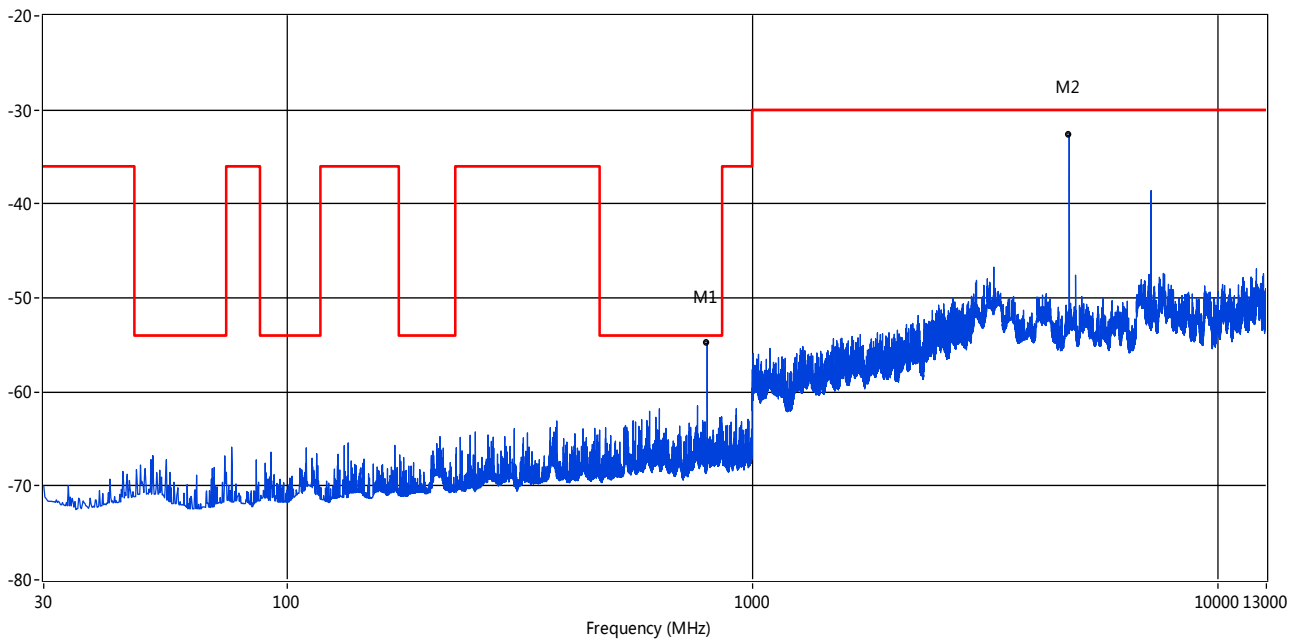EN_RSE_300 328_TX_30-12.75GHz



Remark:

- 1. The emission behaviour belongs to narrowband spurious emission.
- 2. The all data rate modes had been test, but only worse test data was recorded in the test report.



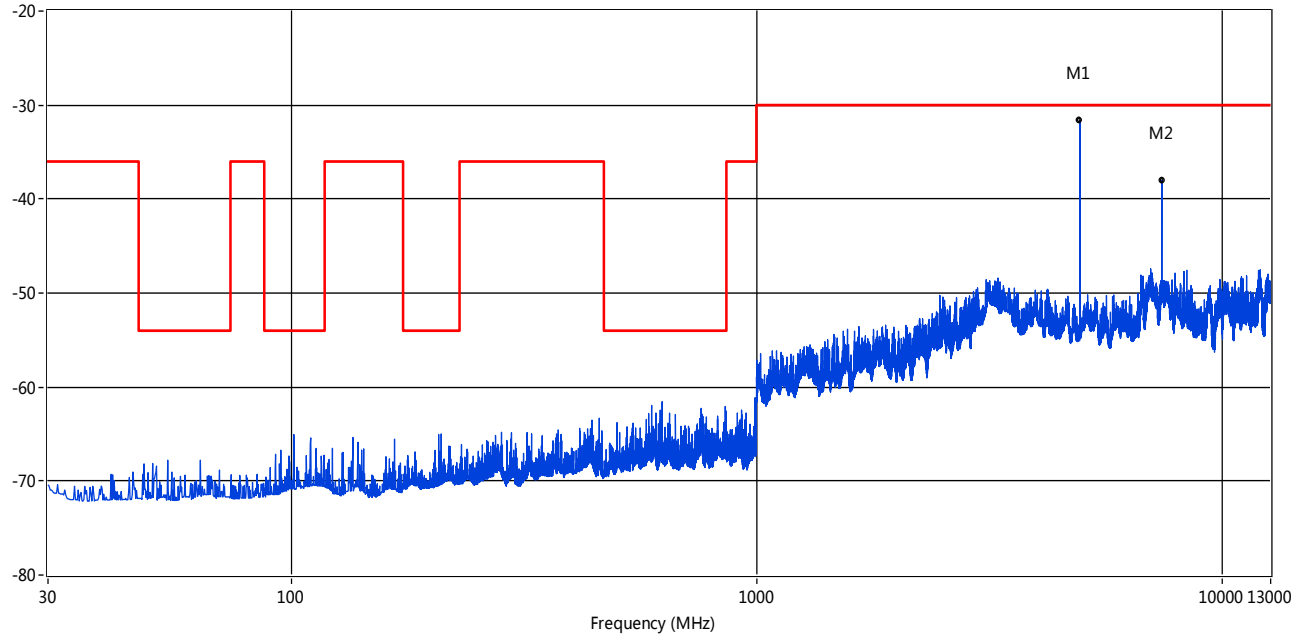
TEST RESULT(30MHz ~ 12750MHz)

Radiated Emissions:

TX GFSK/2480MHz


Horizontal

EN_RSE_300 328_TX_30-12.75GHz



Vertical

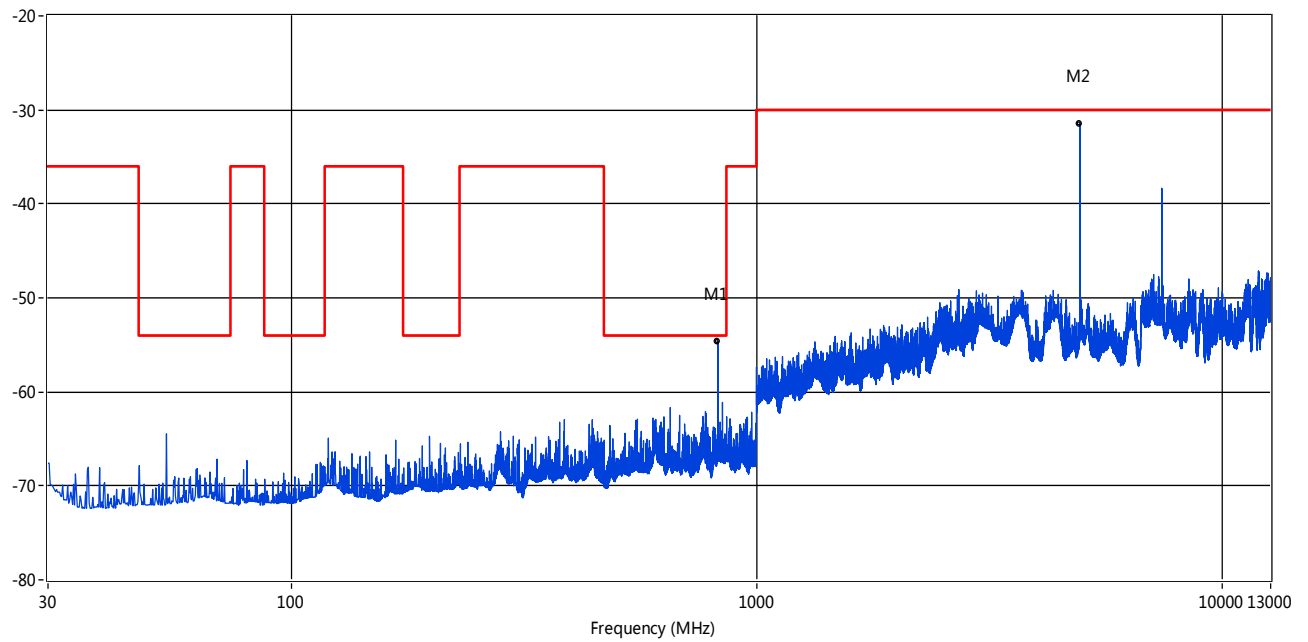EN_RSE_300 328_TX_30-12.75GHz



Remark:

- 1. The emission behaviour belongs to narrowband spurious emission.
- 2. The all data rate modes had been test, but only worse test data was recorded in the test report.



9. SPURIOUS EMISSIONS – RECEIVER

9.1 APPLIED PROCEDURES / LIMIT

Clause	Test Item	Frequency(MHz)	Limit
4.3.1.11	Spurious emissions	30-1000	-57dBm
		1000-12750	-47dBm

9.2 MEASURING INSTRUMENTS AND SETTING

Please refer to refer to ETSI EN 300 328 (V1.9.1) clause 4.3.1.11&5.3.11. The following table is the setting of the Spectrum Analyzer.

Spectrum Analyzer	Setting
Frequency Start to Stop	30 MHz to 1000MHz
Resolution bandwidth / Video bandwidth	100 kHz / 300 kHz
Filter type	3 dB (Gaussian)
Detector mode	Peak
Trace Mode	Max Hold
Sweep Points	≥19 400 (Set as 20000)
Sweep time	Auto

Spectrum Analyzer	Setting
Frequency Start to Stop	1000 MHz to 12750 MHz
Resolution bandwidth / Video bandwidth	1M / 3M
Filter type	3 dB (Gaussian)
Detector mode	Peak
Trace Mode	Max Hold
Sweep Points	≥23 500 (Set as 24 000)
Sweep time	Auto

9.3 TEST PROCEDURES

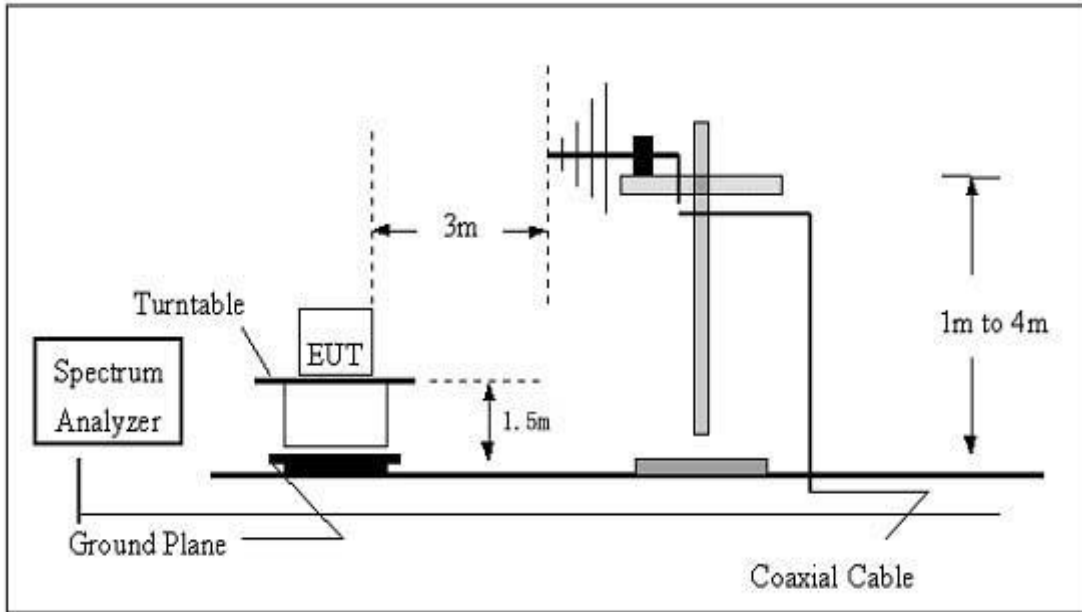
- a. The EUT was placed on the top of the turntable in open test site area.
- b. The test shall be made in the receiving mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- c. For 30~1000MHz/1000~12750MHz spurious emissions measurement, the broad band bi-log receiving antenna was placed 3 meters far away from the turntable.
The broadband receiving antenna was fixed on the same height with the EUT to find each
- d. suspected emissions of both horizontal and vertical polarization. Each recorded suspected value is indicated as Read Level (Raw).
- e. Replace the EUT by standard antenna and feed the RF port by signal generator.
- f. Adjust the frequency of the signal generator to the suspected emission and slightly rotate the turntable to locate the position with maximum reading.
- g. Adjust the power level of the signal generator to reach the same reading with Read Level (Raw).
The level of the spurious emission is the power level of (7) plus the gain of the standard
- h. antenna in dBi and minus the loss of the cable used between the signal generator and the standard antenna.
- i. The measurement shall be repeated at the lowest and the highest channel of the stated frequency range.
- j. EUT Orthogonal Axis:©
“X” - denotes Laid on Table; “Y” - denotes Vertical Stand; “Z” - denotes Side Stand.

9.4 EUT OPERATION DURING TEST


The EUT was programmed to be in continuously receiving mode.

9.5 TEST SETUP LAYOUT

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz



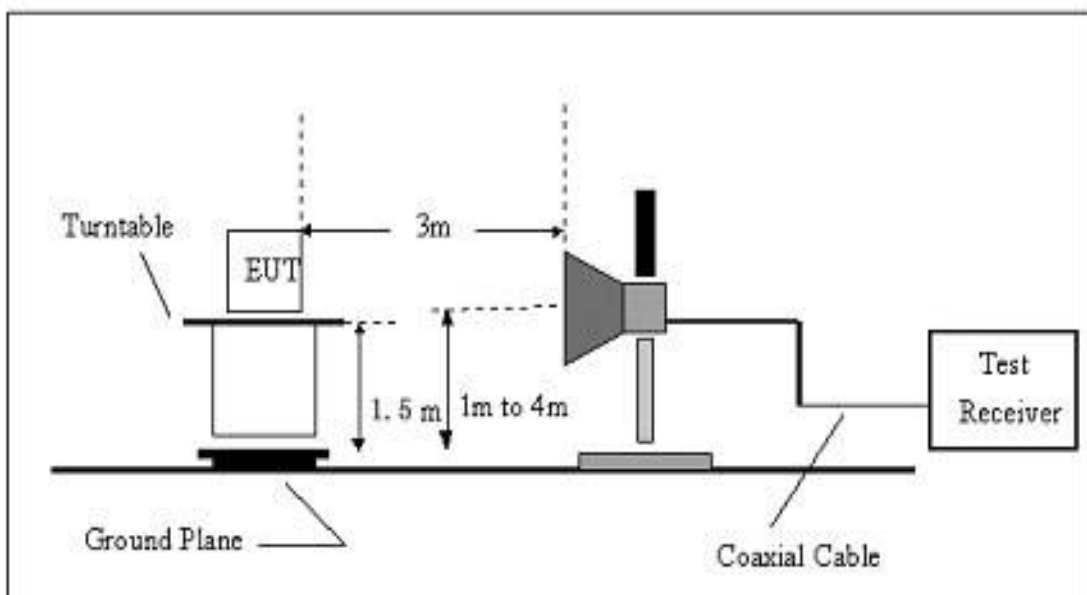(B) Radiated Emission Test Set-Up Frequency Above 1 GHz






9.6 TEST RESULT (30MHz ~ 12750MHz)

Radiated Emissions

RX


Horizontal

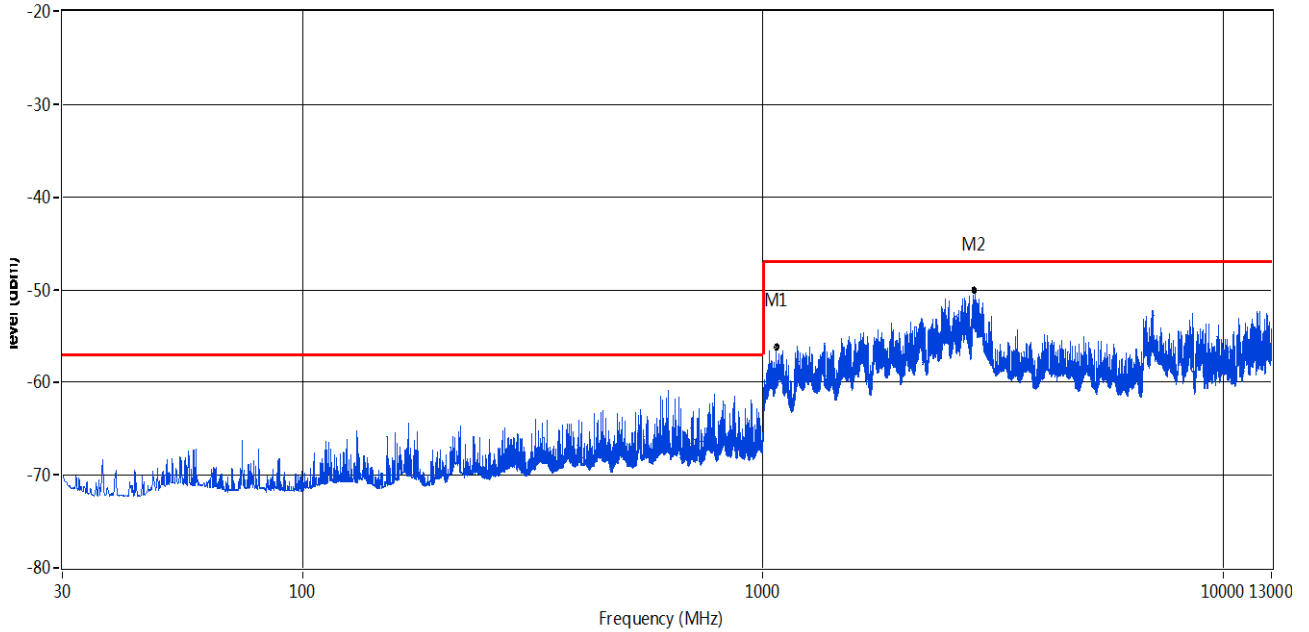EN_RSE_300 328_RX-30-12.75GHz



Vertical

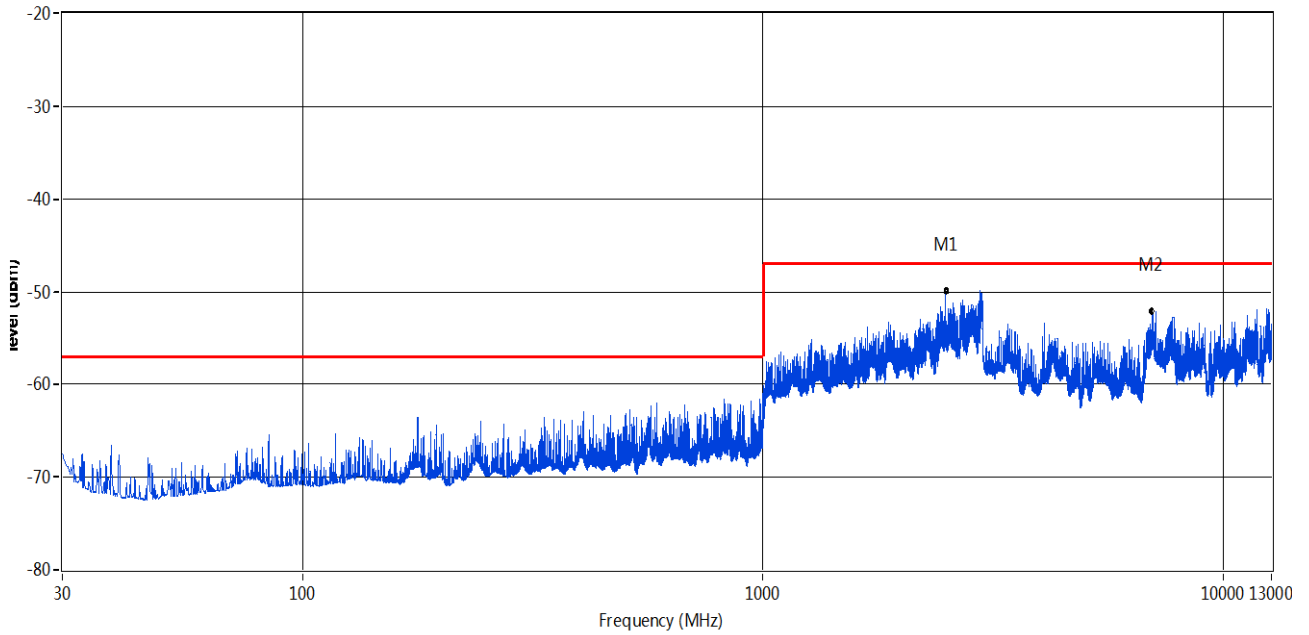EN_RSE_300 328_RX-30-12.75GHz



Remark:

- 1. The emission behaviour belongs to narrowband spurious emission.
- 2. The all data rate modes had been test, but only worse test data was recorded in the test report.

10. RECEIVER BLOCKING

10.1 APPLIED PROCEDURES / LIMIT

Adaptive Frequency Hopping equipment shall comply with the requirements defined in clause 4.3.1.7.2 (LBT based DAA) or clause 4.3.1.7.3 (non-LBT based DAA) in the presence of a blocking signal with characteristics as provided in table 3.


Table 3: Receiver Blocking parameters

Equipment Type (LBT/non-LBT)	Wanted signal mean power from companion device	Blocking signal frequency[MHz]	Blocking signal power[dBm]	Type of interfering signal
LBT	Sufficient to maintain the link(see note 2)	2395 or 2488.5 (see note 1)	-35	CW
Non-LBT	-30 dBm			
<p>Note 1: The highest blocking frequency shall be used for testing hopping frequencies within the range 2 400 MHz to 2 442 MHz, while the lowest blocking frequency shall be used for testing hopping frequencies within the range 2 442 MHz to 2 483,5 MHz. See clause 5.3.7.1.</p> <p>Note 2: A typical value which can be used in most cases is -50 dBm/MHz.</p>				

10.2 TEST PROCEDURES

1. Please refer to ETSI EN 300 328 (V1.9.1) clause 5.3.7.1 for the test conditions.
2. Please refer to ETSI EN 300 328 (V1.9.1) clause 5.3.7.2 for the measurement method.
 - RBW: \geq Occupied Channel Bandwidth (use next available RBW setting above the Occupied Channel Bandwidth)
 - Filter type: Channel Filter
 - RBW:1M
 - VBW:3M (Max 2M)
 - Detector Mode: RMS
 - Centre Frequency: Equal to the hopping frequency to be tested
 - Span: 0 Hz
 - Sweep time: > Channel Occupancy Time of the UUT. If the Channel Occupancy Time is non-contiguous (non-LBT based equipment), the sweep time shall be sufficient to cover the period over which the Channel Occupancy Time is spread out.
 - Trace Mode: Clear/Write
 - Trigger Mode: Video

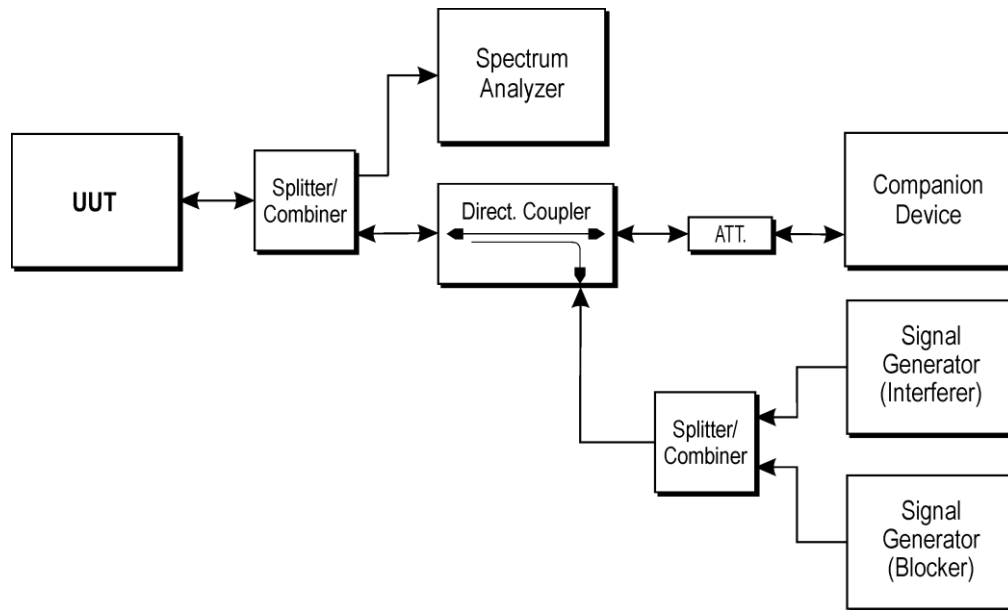10.3 TEST SETUP LAYOUT



10.4 TEST RESULT

Not applicable.





11. ADAPTIVE (CHANNEL ACCESS MECHANISM)

11.1 APPLIED PROCEDURES / LIMIT

The frequency range of the equipment is determined by the lowest and highest

Adaptive Frequency Hopping using LBT based DAA:

1. COT \leq 60 ms;
2. Idle Period = 5% of COT;
3. Detection threshold level = $-70 \text{ dBm/MHz} + (20 \text{ dBm} - P_{\text{out e.i.r.p.}})/1 \text{ MHz}$ (P_{out} in dBm).

Adaptive Frequency Hopping using other forms of DAA (non-LBT based):

1. The frequency shall remain unavailable for a minimum time equal to 1 second or 5 times the actual number of hopping frequencies in the current (adapted) channel map used by the equipment
2. COT \leq 40ms;
3. Idle Period = 5% of COT;
4. Detection threshold level = $-70 \text{ dBm/MHz} + (20 \text{ dBm} - P_{\text{out e.i.r.p.}})/1 \text{ MHz}$ (P_{out} in dBm).

Short Control Signalling Transmissions:


Short Control Signalling Transmissions shall have a maximum duty cycle TxOn / (TxOn + TxOff) ratio of 10 % within any observation period of 50 ms.

11.2 TEST PROCEDURES

1. Please refer to ETSI EN 300 328 (V1.9.1) clause 5.3.7.1 for the test conditions.
2. Please refer to ETSI EN 300 328 (V1.9.1) clause 5.3.7.2.1 for the measurement method.
3. The spectrum analyzer sweep was triggered by the start of the interfering signal, with the interfering signal present, a 100 % duty cycle CW signal is inserted as the blocking signal.
 - RBW: \geq Occupied Channel Bandwidth (if the analyzer does not support this setting, the highest available setting shall be used)
 - RBW: use next available RBW setting below the measured Occupied Channel Bandwidth
 - Filter type: Channel Filter
 - RBW:1M/VBW:3M
 - Detector Mode: RMS
 - Centre Frequency: Equal to the hopping frequency to be tested
 - Span: 0 Hz
 - Sweep time: $>$ Channel Occupancy Time of the UUT. If the Channel Occupancy Time is non-contiguous (non-LBT based equipment), the sweep time shall be sufficient to cover the period over which the Channel Occupancy Time is spread out.
 - Trace Mode: Clear/Write
 - Trigger Mode: Video

Equipment Type (LBT/non- LBT)	Wanted signal mean power from companion device	Blocking signal frequency [MHz]	Blocking signal power [dBm]	Type of interfering signal
LBT	sufficient to maintain the link (see note 2)	2 395 or 2 488,5 (see note 1)	-35	CW
Non-LBT	-30 dBm			
NOTE 1: The highest blocking frequency shall be used for testing hopping frequencies within the range 2 400 MHz to 2 442 MHz, while the lowest blocking frequency shall be used for testing hopping frequencies within the range 2 442 MHz to 2 483,5 MHz. See clause 5.3.7.1.				
NOTE 2: A typical value which can be used in most cases is -50 dBm/MHz.				

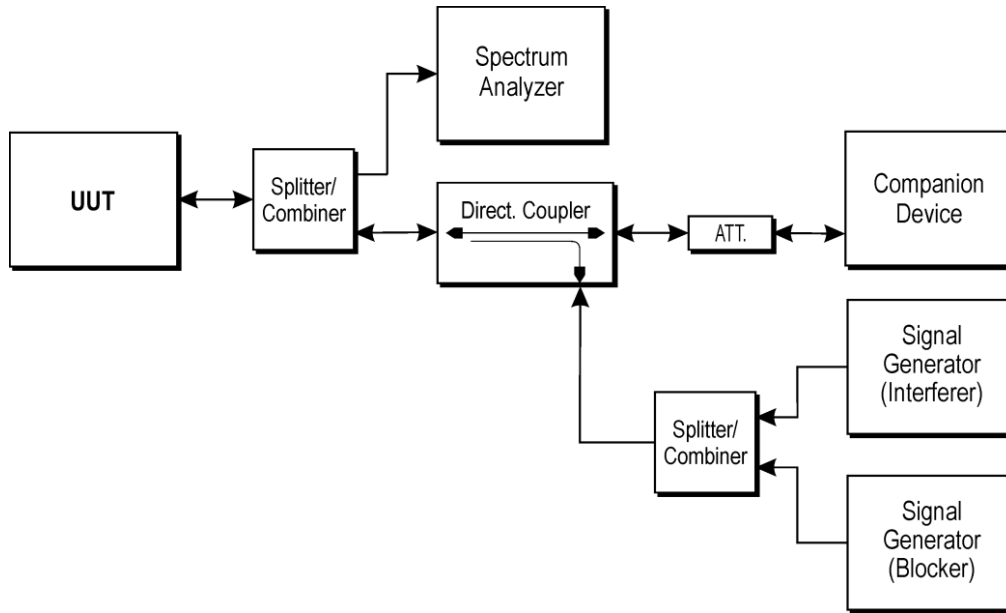11.3 TEST SETUP LAYOUT



11.4 TEST RESULTS

Mode	Stop time after interfering signal(s)	
	low	high
TX Mode	N/A	N/A


Short Control Signalling Transmissions

Mode	Maximum duty cycle(ms)		Limit(ms)
	Low	High	
TX mode	N/A	N/A	N/A

The EUT is not applicable



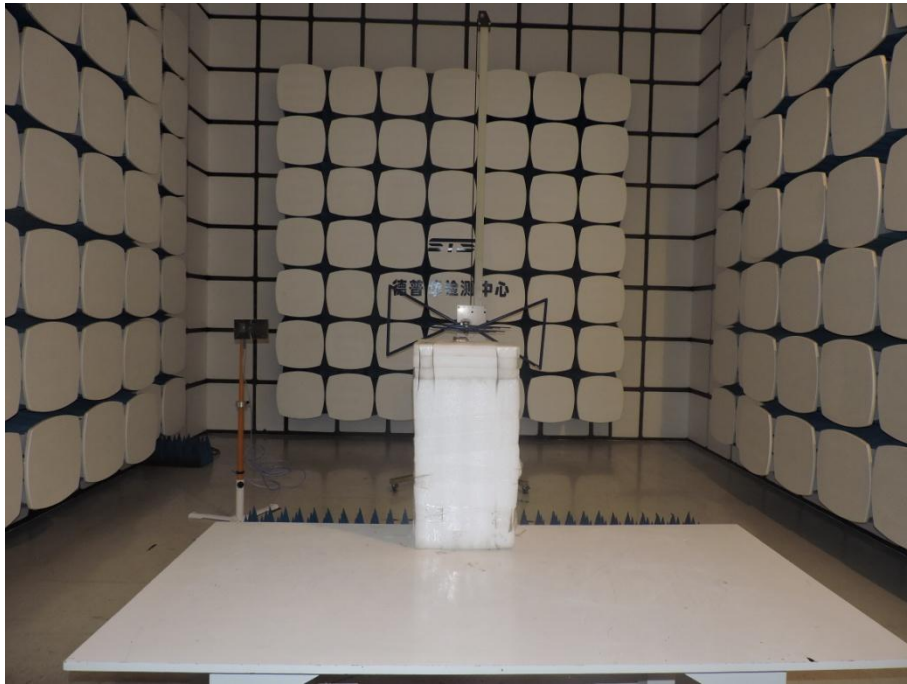Measurement Photos



※※※※※END OF THE REPORT※※※※※

