RF Test Report

Report No.: AGC01813161203EE06

PRODUCT DESIGNATION: 3G Dual-SIM Smartphone

BRAND NAME : vonino

MODEL NAME : Volt S

CLIENT : Vonino ELectronics LTD

DATE OF ISSUE : Dec. 30, 2016

STANDARD(S) EN 300 440-1 V1.6.1: 2010-08 EN 300 440-2 V1.4.1: 2010-08

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report No.: AGC01813161203EE06 Page 2 of 18

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Dec. 30, 2016	Valid	Original Report



Report No.: AGC01813161203EE06 Page 3 of 18

TABLE OF CONTENTS

1. TEST REPORT CERTIFICATION	4
2. GENERAL INFORMATION	5
3. MEASUREMENT UNCERTAINTY	6
4. TEST MODE	7
5. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION	8
6. REQUIREMENT TO RECEIVER	9
6.1 ETSI EN 300 440-1 SUB. 8.1: ADJACENT CHANNEL SELECTIVITY	g
6.2 ETSI EN 300 440-1 SUB. 8.2: BLOCKING OR DESENSITIZATION	g
6.3 ETSI EN 300 440-1 SUB. 8.3: SPURIOUS EMISSIONS	
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	12
APPENDIX B: PHOTOGRAPHS OF EUT	



Report No.: AGC01813161203EE06 Page 4 of 18

1. TEST REPORT CERTIFICATION

Applicant	Vonino ELectronics LTD			
Address	Miramar Tower 10F- No.1010, 132 Nathan Road, Tsim Sha Tsui, Kowloon, Hong Kong			
Manufacturer	Gui zhou Fortuneship Technology Co., Ltd			
Address	No. 4 Plant, High-tech Industrial Park, Xinpu Economic Development Zone) Jingkai Road, Xinpu Jingkai District, Xinpu New District, Zunyi City, Guizhou Province, P. R. China			
Product Designation	3G Dual-SIM Smartphone			
Brand Name	vonino			
Test Model	Volt S			
Date of test	Dec. 15, 2016 to Dec. 22, 2016			
Deviation	None			
Condition of Test Sample	Normal			
Report Template	AGCRT-EC-SRD1/RF			

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. for compliance with the requirements set forth in the European Standard ETSI EN 300 440-1/-2. The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.



Page 5 of 18

2. GENERAL INFORMATION

Details of technical specification refer to the description in follows:

The EUT is a short range, lower power, Wireless transmitter and receiver.

It is designed by way of utilizing the pulse modulation achieves the system operating.

Details of technical specification refer to the description in follows:

Test Mode	GPS Mode(Only receive)
Receiver Frequency	1575.42MHz
Receiver Category	3
Modulation Type	BPSK
Antenna Gain	1.0dBi
Power Supply	Normal Voltage:DC3.8V Limit Voltage : DC4.35V

Note: For more details, please refer to the user's manual.



Page 6 of 18

3. MEASUREMENT UNCERTAINTY

All the measurement equipments and accessories have been carefully selected to meet the maximum measurement uncertainty specified below:

Parameters	Uncertainty
Radio frequency	±1*10 ⁻⁷
RF power (conducted)	±2.5dB
Radiated emission of transmitter, valid to 26.5GHz	±6dB
Radiated emission of transmitter, valid between 26.5GHz and 66GHz	±8dB
Radiated emission of receiver, valid to 26.5GHz	±6dB
Radiated emission of receiver, valid between 26.5GHz and 66GHz	±8dB
Temperature	±1°C
Humidity	±5%
Voltage (DC)	±1%
Voltage (AC, < 10kHz)	±2%

Note: For radiated emissions above 26.5GHz it may not be possible to achieve measurement uncertainties complying with the levels specified in this table. In these cases alone it is acceptable to employ the alternative interpretation procedure specified in clause 10.1

For the test methods, according to the present document the uncertainty figures shall be calculated according to the methods described in the TR 100 028 [i,4] and shall correspond to an expansion factor (coverage factor) k = 1,96 or k = 2 (which provide confidence levels of respectively 95 % and 95,45 % in case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)).

Report No.: AGC01813161203EE06 Page 7 of 18

4. TEST MODE

NO.	TEST MODE DESCRIPTION			
1	RX(Operating Channel)			
2	Standby			




Page 8 of 18

5. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION

Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China
Location	B112-B113, Building 12, Baoan Building Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen, Guangdong, P.R.China

LIST OF EQUIPMENTS USED

Description	Manufacturer	Model No.	S/N	Calibration Date	Calibration Due.
EMI TEST RECEIVER	R&S	ESCI	100694	July 02,2016	July 01,2017
WIDEBAND REQUENCY ANTENNA	SCHWARZBECK	VULB9168	D69250	Mar.01,2016	Feb.28,2017
Amplifier	Schwarzbeck	BBV 9718	9718-162	July 01,2016	June 31,2017
Double-Ridged Waveguide Horn Antenna	ETS LINDGREN	3117	00034609	Mar.01,2016	Feb.28,2017
Climate Chamber	ESPEC	EL-10KA	1	July 02,2016	July 01,2017
Horn Antenna	A.H. Systems Inc.	SAS-574	1	June 1,2016	May 31, 2017

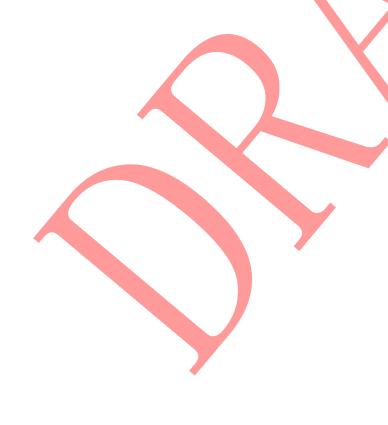

Page 9 of 18

6. REQUIREMENT TO RECEIVER

6.1 ETSI EN 300 440-1 SUB. 8.1: ADJACENT CHANNEL SELECTIVITY N/A

Conclusion:

This clause is applicable if the equipment receiver category 1 has been selected.


6.2 ETSI EN 300 440-1 SUB. 8.2: BLOCKING OR DESENSITIZATION N/A

Conclusion:

This clause is applicable if the equipment receiver category 1 or category 2 has been selected.

Report No.: AGC01813161203EE06 Page 10 of 18

6.3 ETSI EN 300 440-1 SUB. 8.3: SPURIOUS EMISSIONS **TEST SETUP:**

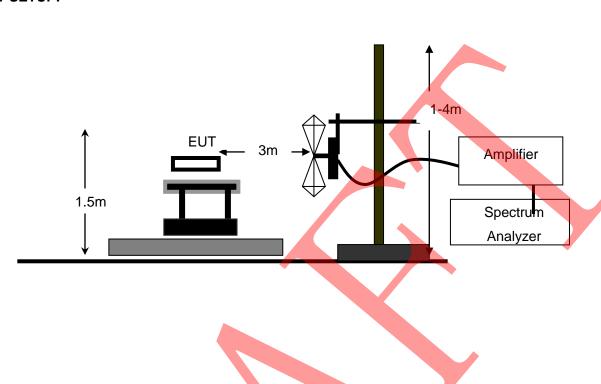

Page 11 of 18

TEST LIMITS:

The power of any spurious emission shall not exceed 2 nW in the range 25 MHz to 1 GHz and shall not exceed 20 nW on frequencies above 1 GHz.

THE PROCEDURE:

EUT was placed on a 1.5m outdoor wooden table. The search antenna is placed at 3m distances from the EUT and search antenna height is from 1-4m. With the transmitter operating at continuously mode, the turntable was slowly rotated to locate the direction of maximum emission. Once maximum direction is determined, the search antenna was raised and lowered in both vertical and horizontal polarizations.

The EUT was removed from the turntable and replaced with a linearly polarized antenna connected to a calibrated RF signal generator. The RF generator was set to a measured emission frequency and the search antenna was raised and lowered to produce a maximum received reading. The generator output was increased to match the radiated emission reading measured previously, and the result expressed in dB EIRP or ERP, correcting for substitution antenna gain at each frequency.

TEST RESULTS:

TEST RESSETS:					
Frequency. (MHz)	Antenna Polarity	Reading (dBm)	Total Factor (dB)	Corrected Power (dBm)	Limit (dBm)
239.135	Н	-82.18	12.76	-69.42	-57
1458.206	Н	-80.31	12.29	-68.02	-47
3863.007	Н	-75.65	11.19	-64.46	-47
358.037	V	-84.46	12.20	-72.26	-57
1817.392	V	-78.93	12.19	-66.74	-47
3152.986	V	-72.23	12.02	-60.21	-47
Other (25-1000)	^ -	1		~	-57
Other (1G-26G)	~		~	~	-47

Note:

[&]quot;~" in the table above means that the emissions are too small to be measured and are at least 20 dB below the limit. The frequency range below 1GHz is 30MHz to 1GHz and the frequency range above 1GHz is 1GHz to 26GHz.

Report No.: AGC01813161203EE06 Page 12 of 18

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

RADIATED SPURIOUS EMISSION TEST SETUP



Page 13 of 18

APPENDIX B: PHOTOGRAPHS OF EUT

All VIEW OF EUT



TOP VIEW OF EUT



Report No.: AGC01813161203EE06 Page 14 of 18

BOTTOM VIEW OF EUT



FRONT VIEW OF EUT




Report No.: AGC01813161203EE06 Page 15 of 18

BACK VIEW OF EUT




LEFT VIEW OF EUT

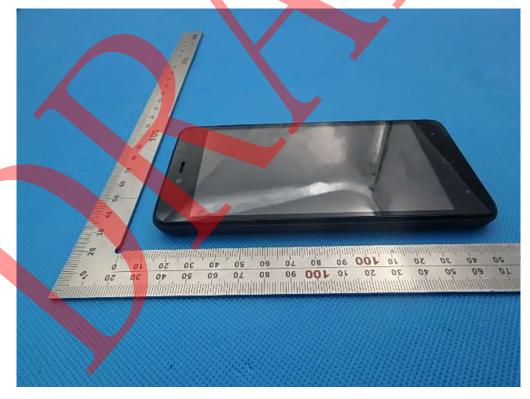

Report No.: AGC01813161203EE06 Page 16 of 18

RIGHT VIEW OF EUT

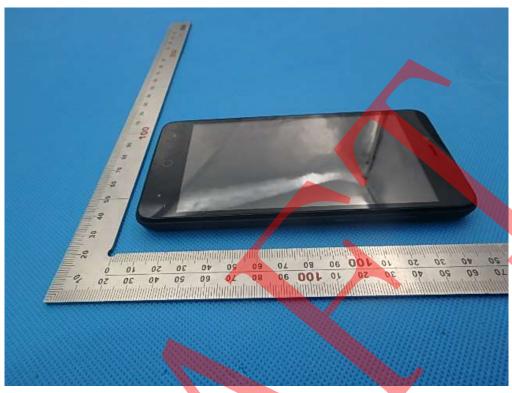


OPEN VIEW OF EUT-1



Report No.: AGC01813161203EE06 Page 17 of 18

OPEN VIEW OF EUT-2

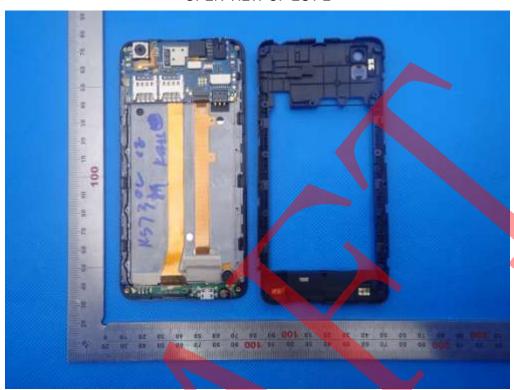


OPEN VIEW OF EUT-3




Report No.: AGC01813161203EE06 Page 18 of 18

INTERNAL VIEW OF EUT-1

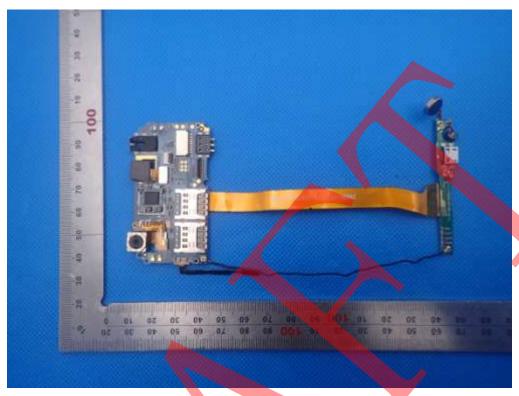

INTERNAL VIEW OF EUT-2

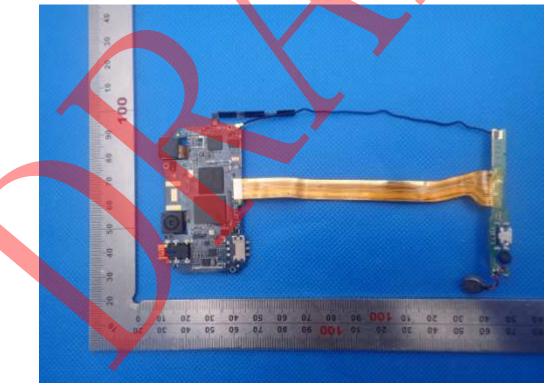

----END OF REPORT----