

EMC REPORT

Applicant: Vonino Electronics Limited

Address of Applicant: UNIT 1109, 11/F., KOWLOON CENTRE 33 ASHLEY ROAD, TSIM SHA TSUI, KOWLOON, HONG KONG

Manufacturer: Vonino Electronics Limited

Address of Manufacturer: UNIT 1109, 11/F., KOWLOON CENTRE 33 ASHLEY ROAD, TSIM SHA TSUI, KOWLOON, HONG KONG

Factory: Shenzhen Universal IoT Corporation Limited

Address of Factory: 1/3/4/5/F, Building 4, Baokun Science and Technology Industrial Park, Dalang Street, Longhua Town, Baoan District, Shenzhen, China

Equipment Under Test (EUT)

Product Name: MID

Model No.: Magnet W10

Applicable standards: ETSI EN 301 489-1 V2.2.0 (2017-03) Draft
ETSI EN 301 489-17 V3.2.0 (2017-03) Draft

Date of sample receipt: September 19, 2017

Date of Test: September 20-25, 2017

Date of report issue: September 26, 2017

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

The CE mark as shown below can be used, under the responsibility of the manufacturer, after completion of an EC Declaration of Conformity and compliance with all relevant EC Directives. The protection requirements with respect to electromagnetic compatibility contained in Directive 2014/53/EU are considered.



Robinson Lo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver

2 Version

| Version No. | Date | Description |
|-------------|--------------------|-------------|
| 00 | September 26, 2017 | Original |
| | | |
| | | |
| | | |
| | | |

Prepared By:




Date:

September 26, 2017

Project Engineer

Check By:



Date:

September 26, 2017

Reviewer

3 Contents

| | Page |
|--|------|
| 1 COVER PAGE | 1 |
| 2 VERSION | 2 |
| 3 CONTENTS | 3 |
| 4 TEST SUMMARY | 4 |
| 5 GENERAL INFORMATION | 5 |
| 5.1 GENERAL DESCRIPTION OF EUT | 5 |
| 5.2 OPERATING MODES | 6 |
| 5.3 DESCRIPTION OF SUPPORT UNITS | 6 |
| 5.4 TEST FACILITY | 6 |
| 5.5 TEST LOCATION | 6 |
| 5.6 DEVIATION FROM STANDARDS | 6 |
| 5.7 ABNORMALITIES FROM STANDARD CONDITIONS..... | 6 |
| 5.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER..... | 6 |
| 6 EQUIPMENT USED DURING TEST | 7 |
| 7 EMC REQUIREMENTS SPECIFICATION IN ETSI EN 301 489-17 | 10 |
| 7.1 EMI (EMISSION) | 10 |
| 7.1.1 Radiated Emission | 10 |
| 7.1.2 Conducted Emissions | 14 |
| 7.1.3 Harmonics Test Results..... | 17 |
| 7.1.4 Flicker Test Results | 17 |
| 7.2 IMMUNITY | 18 |
| 7.2.1 Electrostatic Discharge | 19 |
| 7.2.2 Radiated Immunity | 21 |
| 7.2.3 Radio frequency common mode | 24 |
| 7.2.4 Electrical Fast Transients | 26 |
| 7.2.5 Surge..... | 28 |
| 7.2.6 Voltage Dip and Voltage Interruptions | 30 |
| 8 TEST SETUP PHOTO | 32 |
| 9 EUT CONSTRUCTIONAL DETAILS | 36 |

4 Test Summary

| EMI Test | | | | |
|-----------------------------------|--------------------|------------------|-------------|--------|
| Test Item | Test Requirement | Test Method | Application | Result |
| Radiated Emission | ETSI EN 301 489-17 | ETSI EN301 489-1 | Enclosure | Pass |
| Conducted Emission | ETSI EN 301 489-17 | ETSI EN301 489-1 | AC port | Pass |
| Harmonic Current Emissions | ETSI EN 301 489-17 | ETSI EN301 489-1 | AC port | N/A |
| Voltage Fluctuations and Flicker | ETSI EN 301 489-17 | ETSI EN301 489-1 | AC port | Pass |
| EMS Test | | | | |
| ESD (Electrostatic Discharge) | ETSI EN 301 489-17 | EN 61000-4-2 | Enclosure | Pass |
| Radiated Immunity, 80MHz to 6 GHz | ETSI EN 301 489-17 | EN 61000-4-3 | Enclosure | Pass |
| EFT (Electrical Fast Transients) | ETSI EN 301 489-17 | EN 61000-4-4 | AC port | Pass |
| Surge Immunity | ETSI EN 301 489-17 | EN 61000-4-5 | AC port | Pass |
| Injected Currents 150kHz to 80MHz | ETSI EN 301 489-17 | EN 61000-4-6 | AC port | Pass |
| Voltage Dips and Interruptions | ETSI EN 301 489-17 | EN 61000-4-11 | AC port | Pass |

Remark:

Pass: The EUT complies with the essential requirements in the standard.

N/A: Not applicable

5 General Information

5.1 General Description of EUT

| | |
|--|--|
| Product Name: | MID |
| Model No.: | Magnet W10 |
| Power Supply: | DC3.7V (2 x 3.7V 7800mAh Rechargeable battery) Adaptor Model :CMW05020-001 Input: AC 100-240V, 50-60Hz, 0.2A Output: DC 5V, 2A |
| Bluetooth | |
| Operation Frequency: | 2402~2480MHz |
| Channel Numbers: | 40 |
| Channel Separation: | 2MHz |
| Modulation Type: | GFSK |
| Antenna Type: | Integral antenna |
| Antenna gain: | 0dBi (declare by Applicant) |
| WIFI | |
| Operation Frequency: | 2412MHz~2472MHz (802.11b/802.11g/802.11n(HT20)) 2422MHz~2462MHz (802.11n(H40)) |
| Channel Separation: | 5MHz |
| Modulation Technology: (IEEE 802.11b) | Direct Sequence Spread Spectrum(DSSS) |
| Modulation Technology: (IEEE 802.11g/802.11n) | Orthogonal Frequency Division Multiplexing(OFDM) |
| Antenna Type: | Integral antenna |
| Antenna gain: | 0dBi (declare by Applicant) |

5.2 Operating Modes

| Operating mode | Detail description |
|----------------|--|
| Bluetooth mode | Keep the EUT in charging and communications with other mobile phone with bluetooth function. |
| WiFi mode | Keep the EUT in charging and play internet information by wifi network. |

5.3 Description of Support Units

| |
|-------|
| None. |
|-------|

5.4 Test Facility

| |
|---|
| <p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> ● FCC —Registration No.: 600491 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 22, 2016. ● Industry Canada (IC) —Registration No.: 9079A-2 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. Has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016. |
|---|

5.5 Test Location

| |
|--|
| RI test was performed at: |
| SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab, No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057. |
| All other tests were performed at: |
| Global United Technology Services Co., Ltd. Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China Tel: 0755-27798480 Fax: 0755-27798960 |

5.6 Deviation from Standards

| |
|-------|
| None. |
|-------|

5.7 Abnormalities from Standard Conditions

| |
|-------|
| None. |
|-------|

5.8 Other Information Requested by the Customer

| |
|-------|
| None. |
|-------|

6 Equipment Used during Test

| Radiated Emission: | | | | | | |
|--------------------|---------------------------------------|--------------------------------|-----------------------------|---------------|---------------------|-------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1 | 3m Semi- Anechoic Chamber | ZhongYu Electron | 9.2(L)*6.2(W)* 6.4(H) | GTS250 | July. 03 2015 | July. 02 2020 |
| 2 | Control Room | ZhongYu Electron | 6.2(L)*2.5(W)* 2.4(H) | GTS251 | N/A | N/A |
| 3 | EMI Test Receiver | Rohde & Schwarz | ESU26 | GTS203 | June. 28 2017 | June. 27 2018 |
| 4 | BiConiLog Antenna | SCHWARZBECK MESS-ELEKTRONIK | VULB9163 | GTS214 | June. 28 2017 | June. 27 2018 |
| 5 | Double -ridged waveguide horn | SCHWARZBECK MESS-ELEKTRONIK | 9120D-829 | GTS208 | June. 28 2017 | June. 27 2018 |
| 6 | Horn Antenna | ETS-LINDGREN | 3160 | GTS217 | June. 28 2017 | June. 27 2018 |
| 7 | EMI Test Software | AUDIX | E3 | N/A | N/A | N/A |
| 8 | Coaxial Cable | GTS | N/A | GTS213 | June. 28 2017 | June. 27 2018 |
| 9 | Coaxial Cable | GTS | N/A | GTS211 | June. 28 2017 | June. 27 2018 |
| 10 | Coaxial cable | GTS | N/A | GTS210 | June. 28 2017 | June. 27 2018 |
| 11 | Coaxial Cable | GTS | N/A | GTS212 | June. 28 2017 | June. 27 2018 |
| 12 | Amplifier(100kHz-3GHz) | HP | 8347A | GTS204 | June. 28 2017 | June. 27 2018 |
| 13 | Amplifier(2GHz-20GHz) | HP | 8349B | GTS206 | June. 28 2017 | June. 27 2018 |
| 14 | Amplifier (18-26GHz) | Rohde & Schwarz | AFS33-18002 650-30-8P-44 | GTS218 | June. 28 2017 | June. 27 2018 |
| 15 | Band filter | Amindeon | 82346 | GTS219 | June. 28 2017 | June. 27 2018 |
| 16 | Constant temperature and humidity box | Oregon Scientific | BA-888 | GTS248 | June. 28 2017 | June. 27 2018 |
| 17 | D.C. Power Supply | Instek | PS-3030 | GTS232 | June. 28 2017 | June. 27 2018 |
| 18 | Wideband Radio Communication Tester | Rohde & Schwarz | CMW500 | GTS588 | June. 28 2017 | June. 27 2018 |
| 19 | Splitter | Agilent | 11636B | GTS237 | June. 28 2017 | June. 27 2018 |

| Conducted Emission | | | | | | |
|---------------------------|--------------------------|------------------|----------------------|---------------|---------------------|-------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1 | Shielding Room | ZhongYu Electron | 7.3(L)x3.1(W)x2.9(H) | GTS252 | May.16 2014 | May.15 2019 |
| 2 | EMI Test Receiver | R&S | ESCI 7 | GTS552 | June. 28 2017 | June. 27 2018 |
| 3 | Coaxial Switch | ANRITSU CORP | MP59B | GTS225 | June. 28 2017 | June. 27 2018 |
| 4 | Artificial Mains Network | SCHWARZBECK MESS | NSLK8127 | GTS226 | June. 28 2017 | June. 27 2018 |
| 5 | Coaxial Cable | GTS | N/A | GTS227 | N/A | N/A |
| 6 | EMI Test Software | AUDIX | E3 | N/A | N/A | N/A |
| 7 | Thermo meter | KTJ | TA328 | GTS233 | June. 28 2017 | June. 27 2018 |

| ESD | | | | | | |
|------------|----------------|--------------|-----------|---------------|---------------------|-------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1 | ESD Simulator | KIKUSUI | KES4021A | GTS242 | June. 28 2017 | June. 27 2018 |
| 2 | Thermo meter | KTJ | TA328 | GTS243 | June. 28 2017 | June. 27 2018 |

| Conducted Immunity | | | | | | |
|---------------------------|------------------|--------------|-----------|---------------|---------------------|-------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1 | Signal Generator | R&S | SMA100B | 17-307827 | June. 28 2017 | June. 27 2018 |
| 2 | CDN | LIONCEL | CDN-M3-16 | 170702 | June. 28 2017 | June. 27 2018 |
| 3 | ATT | RFLIGHT | NTWPA | 14103467 | June. 28 2017 | June. 27 2018 |

| Harmonic/ Flicker | | | | | | |
|--------------------------|---------------------------|--------------|-----------|---------------|---------------------|-------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1 | HARMONIC/FLICKER ANALYZER | KIKUSUI | KHA1000 | GTS235 | June. 28 2017 | June. 27 2018 |
| 2 | AC POWER SUPPLY | KIKUSUI | PCR4000LE | GTS236 | June. 28 2017 | June. 27 2018 |
| 3 | LINE IMPEDANCE NETWORK | KIKUSUI | LIN1020JF | GTS237 | June. 28 2017 | June. 27 2018 |
| 4 | Thermo meter | KTJ | TA328 | GTS256 | June. 28 2017 | June. 27 2018 |

| EFT, Surge, Voltage dips and Interruption | | | | | | |
|--|----------------|--------------|-----------|---------------|---------------------|-------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |

| | | | | | | |
|---|---------------|--------|---------|--------|---------------|---------------|
| 1 | EMTEST system | EMTEST | UCS500N | GTS239 | June. 28 2017 | June. 27 2018 |
| 2 | Thermo meter | KTJ | TA328 | GTS238 | June. 28 2017 | June. 27 2018 |

Radiated Immunity:

| Item | Test Equipment | Manufacturer | Model No. | Serial NO. | Cal.Date (mm-dd-yy) | Cal.Due Date (mm-dd-yy) |
|------|---|--------------------------|------------------|------------|---------------------|-------------------------|
| 1 | Fully-Anechoic Chamber 2 | Chang Zhou Zhong Shuo | 854 | SEM001-05 | 2017-06-10 | 2020-06-10 |
| 2 | Power Sensor | Rohde & Schwarz | NRP-Z91 | SEM009-08 | 2017-04-25 | 2018-04-24 |
| 3 | Power Sensor | Rohde & Schwarz | NRP-Z91 | SEM009-09 | 2017-04-25 | 2018-04-24 |
| 4 | Log-periodic Antenna (0.07-3GHz) | Schwarzbeck | VUSLP9111E | SEM003-17 | N/A | N/A |
| 5 | Signal Generator | Rohde & Schwarz | SMB100A | SEM006-11 | 2017-04-25 | 2018-04-24 |
| 6 | Broadband Amplifier (80MHz-1GHz) | Rohde & Schwarz | BBA150- BC250 | SEM005-12 | 2016-10-09 | 2017-10-09 |
| 7 | Broadband Amplifier (800MHz-3GHz) | Rohde & Schwarz | BBA150- D110 | SEM005-13 | 2016-10-09 | 2017-10-09 |
| 8 | Universal Radio Communication Tester | Rohde & Schwarz | CMU 200 | SEM010-01 | 2016-10-09 | 2017-10-09 |
| 9 | Universal Radio Communication Tester | Rohde & Schwarz | CMW 500 | SEM010-03 | 2017-04-25 | 2018-04-24 |
| 10 | Audio Analyzer | Rohde & Schwarz | UPV | SEM008-03 | 2016-10-09 | 2017-10-09 |
| 11 | Conditioning Amplifier | Brüel & Kjaer | 2690-OS2 | SEM005-10 | 2017-04-25 | 2018-04-24 |



General used equipment:

| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
|------|---------------------------------------|--------------|-----------|---------------|---------------------|-------------------------|
| 1 | Humidity/ Temperature Indicator | Shanghai | ZJ1-2B | GTS243 | June. 28 2017 | June. 27 2018 |
| 2 | Barometer | ChangChun | DYM3 | GTS255 | June. 28 2017 | June. 27 2018 |

7 EMC Requirements Specification in ETSI EN 301 489-17

7.1 EMI (Emission)

7.1.1 Radiated Emission
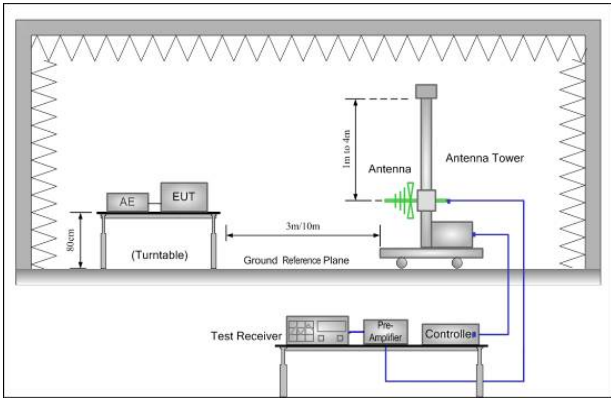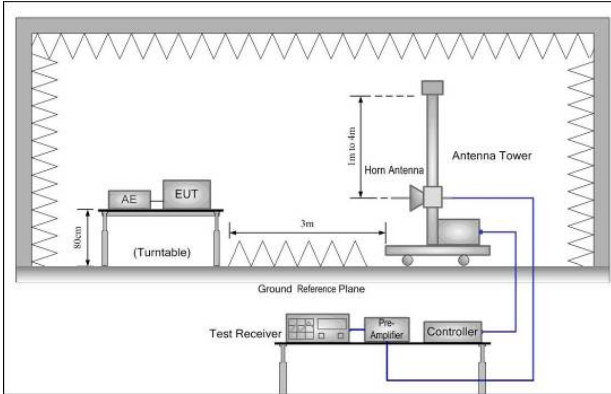
| | | | | | |
|-----------------------|--|--------------------|--------|------------------|------------------|
| Test Requirement: | ETSI EN 301 489-17 | | | | |
| Test Method: | ETSI EN 301 489-1 and CISPR16-2-3 | | | | |
| Test Frequency Range: | 30MHz to 6GHz | | | | |
| Test site: | Measurement Distance: 3m | | | | |
| Receiver setup: | Frequency | Detector | RBW | VBW | Remark |
| | 30MHz-1GHz | Quasi-peak | 100kHz | 300kHz | Quasi-peak Value |
| | Above 1GHz | Peak | 1MHz | 3MHz | Peak Value |
| AV | | 1MHz | 3MHz | Average Value | |
| Limit: | Frequency | Limit (dBuV/m @3m) | | Remark | |
| | 30MHz-230MHz | 40.00 | | Quasi-peak Value | |
| | 230MHz-1GHz | 47.00 | | Quasi-peak Value | |
| | 1GHz-3GHz | 50.00 | | Average Value | |
| | | 70.00 | | Peak Value | |
| | 3GHz-6GHz | 54.00 | | Average Value | |
| 74.00 | | Peak Value | | | |
| Test setup: | Below 1GHz | | | | |
| |  | | | | |
| Test setup: | Above 1GHz | | | | |
| |  | | | | |

| | |
|----------------------------|---|
| <p>Test Procedure:</p> | <p>■ From 30MHz to 1GHz:</p> <ol style="list-style-type: none"> 1. The radiated emissions test was conducted in a semi-anechoic chamber. 2. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation. 3. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT. 4. The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization. <p>■ Above 1GHz:</p> <ol style="list-style-type: none"> 1. The radiated emissions test was conducted in a fully-anechoic chamber. 2. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation. 3. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emission spectrum plots of the EUT. 4. The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization. |
| <p>Test environment:</p> | <p>Temp.: 25 °C Humid.: 50% Press.: 1 010mbar</p> |
| <p>Measurement Record:</p> | <p>Uncertainty: ± 4.5dB</p> |
| <p>Test Instruments:</p> | <p>Refer to section 6.0 for details</p> |
| <p>Test mode:</p> | <p>Refer to section 5.2 for details , Only show test data of the worse mode on the test report.</p> |
| <p>Test results:</p> | <p>Pass</p> |

Measurement Data

Below 1GHz

Bluetooth Mode (V4.0)

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarity |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------------|
| 37.29 | 46.23 | 9.00 | 0.63 | 30.06 | 25.80 | 40.00 | -14.20 | Vertical |
| 47.33 | 42.48 | 8.45 | 0.74 | 30.01 | 21.66 | 40.00 | -18.34 | Vertical |
| 88.65 | 42.71 | 9.96 | 1.10 | 29.75 | 24.02 | 40.00 | -15.98 | Vertical |
| 140.34 | 39.14 | 9.41 | 1.51 | 29.46 | 20.60 | 40.00 | -19.40 | Vertical |
| 216.02 | 37.88 | 8.67 | 1.93 | 29.36 | 19.12 | 40.00 | -20.88 | Vertical |
| 827.49 | 25.45 | 21.32 | 4.57 | 29.17 | 22.17 | 47.00 | -24.83 | Vertical |
| 64.89 | 51.58 | 7.53 | 0.90 | 29.89 | 30.12 | 40.00 | -9.88 | Horizontal |
| 87.73 | 38.92 | 9.74 | 1.09 | 29.76 | 19.99 | 40.00 | -20.01 | Horizontal |
| 129.02 | 33.75 | 9.81 | 1.43 | 29.52 | 15.47 | 40.00 | -24.53 | Horizontal |
| 192.42 | 41.25 | 8.96 | 1.80 | 29.23 | 22.78 | 40.00 | -17.22 | Horizontal |
| 281.01 | 33.66 | 12.79 | 2.27 | 29.88 | 18.84 | 47.00 | -28.16 | Horizontal |
| 533.83 | 30.00 | 15.84 | 3.46 | 29.30 | 20.00 | 47.00 | -27.00 | Horizontal |

WiFi Mode

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarity |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------------|
| 39.44 | 42.22 | 8.70 | 0.65 | 30.05 | 21.52 | 40.00 | -18.48 | Vertical |
| 54.45 | 45.27 | 8.06 | 0.81 | 29.96 | 24.18 | 40.00 | -15.82 | Vertical |
| 74.66 | 41.01 | 7.99 | 0.98 | 29.83 | 20.15 | 40.00 | -19.85 | Vertical |
| 95.09 | 36.88 | 11.40 | 1.15 | 29.72 | 19.71 | 40.00 | -20.29 | Vertical |
| 153.20 | 41.43 | 8.90 | 1.59 | 29.39 | 22.53 | 40.00 | -17.47 | Vertical |
| 739.66 | 26.59 | 18.70 | 4.24 | 29.20 | 20.33 | 47.00 | -26.67 | Vertical |
| 59.44 | 40.59 | 7.67 | 0.86 | 29.93 | 19.19 | 40.00 | -20.81 | Horizontal |
| 73.88 | 46.96 | 7.88 | 0.97 | 29.83 | 25.98 | 40.00 | -14.02 | Horizontal |
| 97.46 | 36.07 | 11.40 | 1.17 | 29.71 | 18.93 | 40.00 | -21.07 | Horizontal |
| 157.56 | 45.90 | 8.71 | 1.62 | 29.37 | 26.86 | 40.00 | -13.14 | Horizontal |
| 218.31 | 41.60 | 8.89 | 1.95 | 29.38 | 23.06 | 40.00 | -16.94 | Horizontal |
| 742.26 | 32.25 | 18.59 | 4.24 | 29.20 | 25.88 | 47.00 | -21.12 | Horizontal |

Above 1GHz

Bluetooth Mode (V4.0)

Peak measurement

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarity |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------------|
| 1420.00 | 39.80 | 25.49 | 4.63 | 33.47 | 36.45 | 70.00 | -33.55 | Vertical |
| 2395.00 | 37.11 | 27.59 | 5.39 | 34.01 | 36.08 | 70.00 | -33.92 | Vertical |
| 3065.00 | 36.91 | 28.67 | 6.08 | 33.26 | 38.40 | 74.00 | -35.60 | Vertical |
| 3720.00 | 34.54 | 29.26 | 7.38 | 32.50 | 38.68 | 74.00 | -35.32 | Vertical |
| 4230.00 | 33.62 | 30.32 | 8.09 | 31.92 | 40.11 | 74.00 | -33.89 | Vertical |
| 5495.00 | 32.71 | 31.98 | 9.49 | 32.42 | 41.76 | 74.00 | -32.24 | Vertical |
| 1700.00 | 39.69 | 24.98 | 4.80 | 33.94 | 35.53 | 70.00 | -34.47 | Horizontal |
| 2655.00 | 36.49 | 27.96 | 5.63 | 33.72 | 36.36 | 70.00 | -33.64 | Horizontal |
| 3725.00 | 34.21 | 29.27 | 7.38 | 32.50 | 38.36 | 74.00 | -35.64 | Horizontal |
| 3920.00 | 34.08 | 29.54 | 7.73 | 32.27 | 39.08 | 74.00 | -34.92 | Horizontal |
| 4880.00 | 30.46 | 31.85 | 8.66 | 32.12 | 38.85 | 74.00 | -35.15 | Horizontal |
| 5670.00 | 29.79 | 32.44 | 9.74 | 32.33 | 39.64 | 74.00 | -34.36 | Horizontal |

WiFi Mode

Peak measurement

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarity |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|------------|
| 1625.00 | 41.15 | 24.92 | 4.76 | 33.82 | 37.01 | 70.00 | -32.99 | Vertical |
| 2585.00 | 37.44 | 27.74 | 5.57 | 33.80 | 36.95 | 70.00 | -33.05 | Vertical |
| 3225.00 | 38.23 | 28.66 | 6.41 | 33.06 | 40.24 | 74.00 | -33.76 | Vertical |
| 3935.00 | 33.11 | 29.58 | 7.75 | 32.25 | 38.19 | 74.00 | -35.81 | Vertical |
| 4675.00 | 31.94 | 31.63 | 8.49 | 32.02 | 40.04 | 74.00 | -33.96 | Vertical |
| 5710.00 | 31.27 | 32.50 | 9.81 | 32.30 | 41.28 | 74.00 | -32.72 | Vertical |
| 1325.00 | 38.70 | 25.67 | 4.56 | 33.30 | 35.63 | 70.00 | -34.37 | Horizontal |
| 2050.00 | 38.51 | 26.45 | 5.01 | 34.40 | 35.57 | 70.00 | -34.43 | Horizontal |
| 2885.00 | 36.76 | 28.42 | 5.83 | 33.45 | 37.56 | 70.00 | -32.44 | Horizontal |
| 3485.00 | 37.06 | 28.93 | 6.93 | 32.77 | 40.15 | 74.00 | -33.85 | Horizontal |
| 4725.00 | 29.45 | 31.68 | 8.53 | 32.05 | 37.61 | 74.00 | -36.39 | Horizontal |
| 5730.00 | 30.68 | 32.53 | 9.83 | 32.29 | 40.75 | 74.00 | -33.25 | Horizontal |

Remark:


1. The EUT was test at 3m in field chamber.
2. If the average limit is met when using a Peak detector, the EUT shall be deemed to meet both peak and average limits. And measurement with the average detector is unnecessary.

7.1.2 Conducted Emissions

| | | | | | | |
|--|---|--------------|-----------|-----|---------|-----------|
| Test Requirement: | ETSI EN 301 489-17 | | | | | |
| Test Method: | ETSI EN 301 489-1 | | | | | |
| Test Frequency Range: | 150kHz to 30MHz | | | | | |
| Class / Severity: | Class B | | | | | |
| Receiver setup: | RBW=9kHz, VBW=30kHz | | | | | |
| Limit: | Frequency range (MHz) | Limit (dBuV) | | | | |
| | | Quasi-peak | Average | | | |
| | 0.15-0.5 | 66 to 56* | 56 to 46* | | | |
| | 0.5-5 | 56 | 46 | | | |
| | 5-30 | 60 | 50 | | | |
| * Decreases with the logarithm of the frequency. | | | | | | |
| Test setup: | <p>Reference Plane</p> <p>LISN</p> <p>40cm</p> <p>80cm</p> <p>AUX Equipment</p> <p>E.U.T.</p> <p>Test table/Insulation plane</p> <p>LISN</p> <p>Filter</p> <p>AC power</p> <p>EMI Receiver</p> | | | | | |
| | <p>Remark:</p> <p>E.U.T: Equipment Under Test</p> <p>LISN: Line Impedance Stabilization Network</p> <p>Test table height=0.8m</p> | | | | | |
| Test procedure | <ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to EN55032 Class B on conducted measurement. | | | | | |
| Test Instruments: | Temp.: | 24 °C | Humid.: | 51% | Press.: | 1 010mbar |
| Measurement Record: | Uncertainty: ± 3.45dB | | | | | |
| Test Instruments: | Refer to section 6.0 for details | | | | | |
| Test mode: | Refer to section 5.2 for details, Only show test data of the worse mode on the test report. | | | | | |
| Test results: | Pass | | | | | |


WIFI mode

Line:

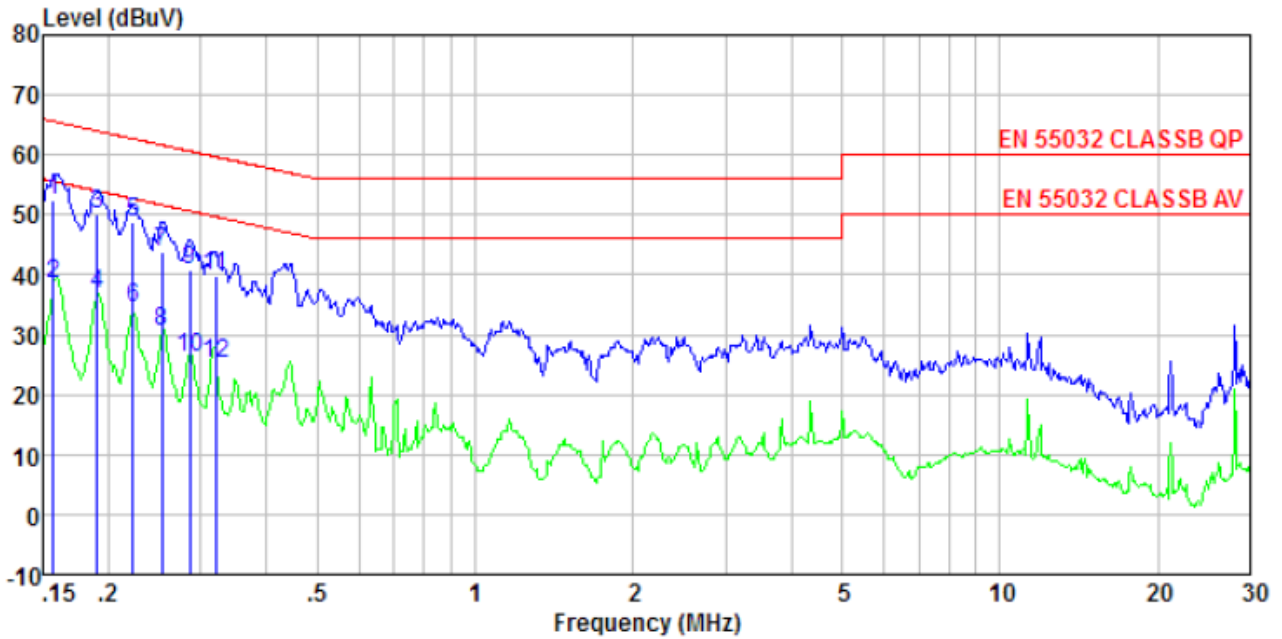

| Freq MHz | Reading level dBuV | LIISN/ISN factor dB | Cable loss dB | level dBuV | Limit level dBuV | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|---------------|------------------------|---------------------|---------|
| 0.157 | 51.90 | 0.42 | 0.12 | 52.44 | 65.60 | -13.16 | QP |
| 0.157 | 37.92 | 0.42 | 0.12 | 38.46 | 55.60 | -17.14 | Average |
| 0.190 | 49.63 | 0.42 | 0.13 | 50.18 | 64.02 | -13.84 | QP |
| 0.190 | 36.14 | 0.42 | 0.13 | 36.69 | 54.02 | -17.33 | Average |
| 0.223 | 48.35 | 0.43 | 0.12 | 48.90 | 62.70 | -13.80 | QP |
| 0.223 | 33.92 | 0.43 | 0.12 | 34.47 | 52.70 | -18.23 | Average |
| 0.253 | 43.39 | 0.44 | 0.11 | 43.94 | 61.64 | -17.70 | QP |
| 0.253 | 29.86 | 0.44 | 0.11 | 30.41 | 51.64 | -21.23 | Average |
| 0.286 | 40.41 | 0.44 | 0.10 | 40.95 | 60.63 | -19.68 | QP |
| 0.286 | 25.52 | 0.44 | 0.10 | 26.06 | 50.63 | -24.57 | Average |
| 0.320 | 39.30 | 0.44 | 0.10 | 39.84 | 59.71 | -19.87 | QP |
| 0.320 | 24.76 | 0.44 | 0.10 | 25.30 | 49.71 | -24.41 | Average |

Neutral:

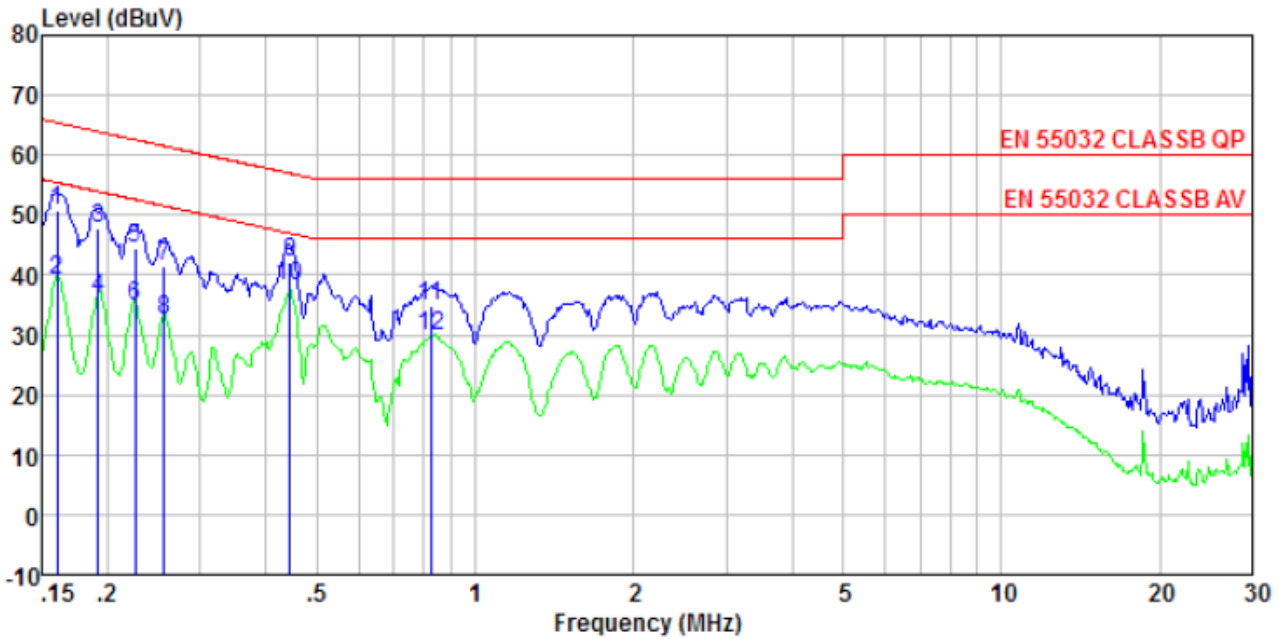

| Freq MHz | Reading level dBuV | LISN/ISN factor dB | Cable loss dB | level dBuV | Limit level dBuV | Over limit dB | Remark |
|-------------|--------------------------|--------------------------|---------------------|---------------|------------------------|---------------------|---------|
| 0.161 | 50.23 | 0.41 | 0.12 | 50.76 | 65.43 | -14.67 | QP |
| 0.161 | 38.66 | 0.41 | 0.12 | 39.19 | 55.43 | -16.24 | Average |
| 0.192 | 47.12 | 0.41 | 0.13 | 47.66 | 63.93 | -16.27 | QP |
| 0.192 | 35.73 | 0.41 | 0.13 | 36.27 | 53.93 | -17.66 | Average |
| 0.226 | 44.07 | 0.42 | 0.12 | 44.61 | 62.61 | -18.00 | QP |
| 0.226 | 34.46 | 0.42 | 0.12 | 35.00 | 52.61 | -17.61 | Average |
| 0.256 | 40.84 | 0.42 | 0.11 | 41.37 | 61.56 | -20.19 | QP |
| 0.256 | 32.03 | 0.42 | 0.11 | 32.56 | 51.56 | -19.00 | Average |
| 0.444 | 41.70 | 0.38 | 0.11 | 42.19 | 56.98 | -14.79 | QP |
| 0.444 | 37.71 | 0.38 | 0.11 | 38.20 | 46.98 | -8.78 | Average |
| 0.822 | 34.64 | 0.23 | 0.13 | 35.00 | 56.00 | -21.00 | QP |
| 0.822 | 29.49 | 0.23 | 0.13 | 29.85 | 46.00 | -16.15 | Average |

Notes:

1. An initial pre-scan was performed on the live and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

7.1.3 Harmonics Test Results

| | |
|-------------------|---|
| Test Requirement: | ETSI EN 301 489-17: EN 61000-3-2 |
| Test Method: | N/A: See Remark Below |
| Remark: | <p>There is no need for Harmonics test to be performed on this product (rated power is less than 75W) in accordance with EN 61000-3-2. For further details, please refer to Clause 7, Note 1 of EN 61000-3-2</p> <p>Which states: "For the following categories of equipment limits are not specified in this edition of the standard. Note 1: Equipment with a rated power of 75W or less, other than lighting equipment."</p> |

7.1.4 Flicker Test Results

| | | | | | | |
|-------------------|---|-------|---------|-----|---------|-----------|
| Test Requirement: | ETSI EN 301 489-17: EN 61000-3-3 | | | | | |
| Test Method: | EN 61000-3-3 | | | | | |
| Class/Severity: | Clause 5 of EN 61000-3-3 | | | | | |
| Measurement Time: | 10 min | | | | | |
| Detector: | As per EN 61000-3-3 | | | | | |
| Test Instruments: | Temp.: | 24 °C | Humid.: | 51% | Press.: | 1 010mbar |
| Test Instruments: | Refer to section 6.0 for details | | | | | |
| Test mode: | Refer to section 5.2 for details, Only show test data of the worse mode on the test report. | | | | | |
| Test results: | Pass | | | | | |

Measurement Data

WiFi mode

| | EUT values | Limit | Result |
|----------|------------|-------|--------|
| Pst | 0.028 | 1.00 | PASS |
| dc [%] | 0.015 | 3.30 | PASS |
| dmax [%] | 0.071 | 4.00 | PASS |
| dt [s] | 0.000 | 0.50 | PASS |

7.2 Immunity

| Performance Criteria of ETSI EN 301 489-17, clause 6 | |
|--|--|
| Continuous phenomena applied to transmitters (CT) | <ol style="list-style-type: none"> 1. During the test, the uplink speech output level shall be at least 35 dB less than the previously recorded reference levels, when measured through an audio band pass filter of width 200 Hz, centred on 1 kHz (audio breakthrough check). 2. At the conclusion of the test, the EUT shall operate as intended with no loss of user control functions or stored data, and the communication link shall have been maintained. 3. In addition to confirming the above performance during a call, the test shall also be performed in idle mode, and the transmitter shall not unintentionally operate. |
| Transient phenomena applied to Transmitters (TT) | <ol style="list-style-type: none"> 1. At the conclusion of each exposure the EUT shall operate with no user noticeable loss of the communication link. 2. At the conclusion of the total test comprising the series of individual exposures, the EUT shall operate as intended with no loss of user control functions or stored data, as declared by the manufacturer, and the communication link shall have been maintained. 3. In addition to confirming the above performance during a call, the test shall also be performed in idle mode, and the transmitter shall not unintentionally operate. |
| Continuous phenomena applied to Receivers (CR) | <ol style="list-style-type: none"> 1. During the test, the RXQUAL of the downlink shall not exceed the value of three, measured during each individual exposure in the test sequence. 2. During the test, the downlink speech output level shall be at least 35 dB less than the previously recorded reference levels, when measured through an audio band pass filter of width 200 Hz, centred on 1 kHz (audio breakthrough check). 3. At the conclusion of the test, the EUT shall operate as intended with no loss of user control the The communication link shall have been maintained. |
| Transient phenomena applied to Receivers (TR) | <ol style="list-style-type: none"> 1. At the conclusion of each exposure the EUT shall operate with no user noticeable loss of the communication link. 2. At the conclusion of the total test comprising the series of individual exposures, the EUT shall operate as intended with no loss of user control functions or stored data, as declared by the manufacturer, and the communication link shall have been maintained |
| Ancillary equipment tested on a stand alone basis | <p>If ancillary equipment is intended to be tested on a stand alone basis, the performance criteria described in the clauses above are not appropriate, then the manufacturer shall declare, for inclusion in the test report, his own specification for an acceptable level of performance or degradation of performance during and/or after the immunity tests. The performance specification shall be included in the product description and documentation.</p> |

7.2.1 Electrostatic Discharge

| | |
|----------------------|---|
| Test Requirement: | ETSI EN 301 489-17 |
| Test Method: | EN 61000-4-2 |
| Discharge Voltage: | Contact Discharge: $\pm 4\text{kV}$ Air Discharge: $\pm 2\text{kV}$, $\pm 4\text{kV}$, $\pm 8\text{kV}$ HCP/VCP: $\pm 4\text{kV}$ |
| Polarity: | Positive & Negative |
| Number of Discharge: | Contact Discharge: Minimum 10 times at each test point, Air Discharge: Minimum 10 times at each test point. |
| Discharge Mode: | Single Discharge |
| Discharge Period: | 1 second minimum |
| Limit: | Criteria B |
| Test setup: | |
| Test Procedure: | <p>Air discharge:</p> <ol style="list-style-type: none"> 1. The test was applied on non-conductive surfaces of EUT. 2. The round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT. 3. After each discharge, the discharge electrode was removed from the EUT. 4. The generator was re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. 5. This procedure was repeated until all the air discharge completed <p>Contact Discharge:</p> <ol style="list-style-type: none"> 1. The test was applied on conductive surfaces of EUT. 2. the generator was re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. 3. the tip of the discharge electrode was touch the EUT before the discharge switch was operated. <p>Indirect discharge for horizontal coupling plane</p> <ol style="list-style-type: none"> 1. At least 10 single discharges shall be applied at the front edge of each HCP opposite the centre point of each unit of the EUT and 0.1m from the front of the EUT. 2. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge. 3. Consideration should be given to exposing all sides of the EUT. |

| | |
|-------------------|--|
| | Indirect discharge for vertical coupling plane 1. At least 10 single discharges were applied to the center of one vertical edge of the coupling plane. 2. The coupling plane, of dimensions 0.5m X 0.5m, was placed parallel to, and positioned at a distance of 0.1m from the EUT. 3. Discharges were applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated. |
| Test environment: | Temp.: 24 °C Humid.: 51% Press.: 1 010mbar |
| Test Instruments: | Refer to section 6.0 for details |
| Test mode: | Refer to section 5.2 for details |
| Test results: | Pass |


Measurement Record:

| | | | | |
|-------------------------------|--|--------------------|---------------------------------|---------------|
| Test points: | I: Metallic parts, screws | | | |
| | II: All plastic seams, surface | | | |
| Direct discharge | | | | |
| Discharge Voltage (KV) | Type of discharge | Test points | Observations Performance | Result |
| ± 4 | Contact | I | A | Pass |
| ± 2, ± 4, ± 8 | Air | II | A | Pass |
| Indirect discharge | | | | |
| Discharge Voltage (KV) | Type of discharge | Test points | Observation Performance | Result |
| ± 4 | HCP-Bottom/Top/ Front/Back/Left/Right | Edge of the HCP | A | Pass |
| ± 4 | VCP-Front/Back /Left/Right | Center of the VCP | A | Pass |

Remark:

A: Normal performance within the specification limits.

7.2.2 Radiated Immunity
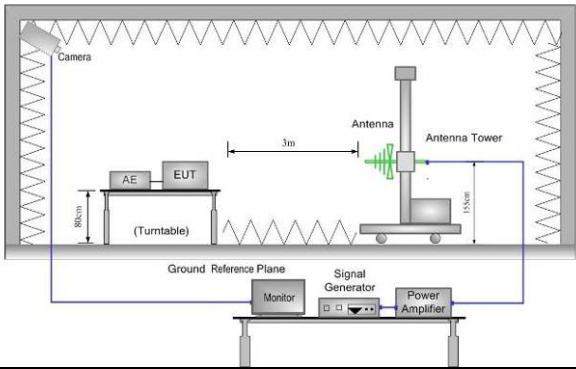
| | |
|------------------------|--|
| Test Requirement: | ETSI EN 301 489-17 |
| Test Method: | EN 61000-4-3 |
| Frequency range: | 80MHz to 6GHz |
| Test Level: | 3V/m |
| Modulation: | 80%, 1kHz Amplitude Modulation |
| Performance Criterion: | Criteria A |
| Test setup: |  |
| Test Procedure: | <ol style="list-style-type: none"> 1. For table-top equipment, the EUT was placed in the chamber on a non-conductive table 0.8m high. For arrangement of floor-standing equipment, the EUT was mounted on a non-conductive support 0.1m above the supporting plane. For human body-mounted equipment, the EUT may be tested in the same manner as table top items. 2. If possible, a minimum of 1 m of cable is exposed to the electromagnetic field. Excess length of cables interconnecting units of the EUT shall be bundled low-inductively in the approximate center of the cable to form a bundle 30 cm to 40 cm in length. 3. The EUT was initially placed with one face coincident with the calibration plane. The EUT face being illuminated was contained within the UFA (Uniform Field Area). 4. The frequency ranges to be considered were swept with the signal modulated and pausing to adjust the RF signal level or to switch oscillators and antennas as necessary. Where the frequency range was swept incrementally, the step size was not exceed 1 % of the preceding frequency value. 5. The dwell time of the amplitude modulated carrier at each frequency was not be less than the time necessary for the EUT to be exercised and to respond, and was not less than 0,5 s. 6. The test normally was performed with the generating antenna facing each side of the EUT. 7. The polarization of the field generated by each antenna necessitates testing each selected side twice, once with the antenna positioned vertically and again with the antenna positioned horizontally. 8. The EUT was performed in a configuration to actual installation conditions, a video camera and/or a audio monitor were used to monitor the performance of the EUT. |

| | |
|-------------------|--|
| Test monitor: | Traffic mode: 1. The test system shall simulate a Base Station (BS) with Broadcast Control Channel/Common Control Channel (BCCH/CCCH) on one carrier. 2. The EUT shall be synchronized to the BCCH, listening to the CCCH and able to respond to paging messages. |
| | Idle mode: 1. The test system shall simulate a Base Station (BS) with Broadcast Control Channel/Common Control Channel (BCCH/CCCH) on one carrier. 2. The EUT shall be synchronized to the BCCH, listening to the CCCH and able to respond to paging messages. |
| Test environment: | Temp.: 25 °C Humid.: 52% Press.: 1 010mbar |
| Test Instruments: | Refer to section 6.0 for details |
| Test results: | Pass |

Measurement Record:

Measurement result:

| Frequency | Level | Modulation | Operating Mode | Antenna Polarization | EUT Face | Observations (Performance Criterion) |
|--------------|-------|---|----------------|----------------------|----------|--------------------------------------|
| 80 MHz-6 GHz | 3 V/m | 1 kHz, 80 % Amp. Mod, 1 % increment | Traffic mode | V | Front | A |
| | | | | H | | A |
| | | | | V | Rear | A |
| | | | | H | | A |
| | | | | V | Left | A |
| | | | | H | | A |
| | | | | V | Right | A |
| | | | | H | | A |
| | | | | V | Top | A |
| | | | | H | | A |
| | | | | V | Bottom | A |
| | | | | H | | A |

Remarks:

A: normal performance within the specification limits

7.2.3 Radio frequency common mode

| | |
|------------------------|--|
| Test Requirement: | ETSI EN 301 489-17 |
| Test Method: | EN 61000-4-6 |
| Frequency range: | 0.15MHz to 80MHz |
| Test Level: | 3V rms on AC Ports (unmodulated emf into 150 Ω) |
| Modulation: | 80%, 1kHz Amplitude Modulation |
| Performance Criterion: | Criteria A |
| Test setup: | |
| Test Procedure: | <ol style="list-style-type: none"> 1. Let the EUT work in test mode and test it. 2. The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible). 3. The disturbance signal described below is injected to EUT through CDN. 4. The EUT operates within its operational mode(s) under intended climatic conditions after power on. 5. The frequency range is swept from 0.150MHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1kHz sine wave. The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally; the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value. 6. Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion. |
| Test environment: | Temp.: 24 °C Humid.: 51% Press.: 1 010mbar |
| Test Instruments: | Refer to section 6.0 for details |
| Test results: | Pass |

Measurement Record:

| Frequency | Injected Position | Test Level | Modulation | Step Size | Dwell Time | Observations (Performance Criterion) |
|-----------------|-------------------|------------|---------------------|-----------|------------|--------------------------------------|
| 150kHz to 80MHz | AC Main | 3Vrms | 80%, 1kHz Amp. Mod. | 1% | 2s | A |

Remark:

A: Normal performance within the specification limits.

7.2.4 Electrical Fast Transients

| | |
|------------------------|---|
| Test Requirement: | ETSI EN 301 489-17 |
| Test Method: | EN 61000-4-4 |
| Test Level: | 1.0kV on AC port |
| Polarity: | Positive & Negative |
| Repetition Frequency: | 5kHz |
| Burst Duration: | 15ms |
| Burst Period: | 300ms |
| Test Duration: | 2 minute per level & polarity |
| Performance Criterion: | B |
| Test setup: | <p>The diagram illustrates the test setup. An EMC Tester and an EUT are positioned on a non-conducted table. The table is supported by a wood support with a height of 0.1m + 0.01m. A grounding cable is connected to the table. A ground reference plane is located below the table, with a 10cm gap between the EUT and the plane. The table height is 80cm.</p> |
| Test Procedure: | <ol style="list-style-type: none"> 1. The EUT and its simulators were placed on the ground reference plane and were insulated from it by a wood support 0.1m + 0.01m thick. The ground reference plane was 1m*1m metallic sheet with 0.65mm minimum thickness. 2. This reference ground plane was project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane was more than 0.5m. 3. All cables to the EUT was placed on the wood support, cables not subject to EFT/B was routed as far as possible from the cable under test to minimize the coupling between the cables. 4. The length of the signal and power lines between the coupling device and the EUT is 0.5m <p>Test on Signal Ports, Telecommunication Ports and Control Ports: The EFT interference signal is through a coupling clamp device couples to the signal and control lines of the EUT with burst noise for 2 minutes.</p> <p>Test on power supply ports:</p> <ol style="list-style-type: none"> 1. The EUT is connected to the power mains through a coupling device that directly couples the EFT/B interference signal. 2. Each of the Line and Neutral conductors is impressed with burst noise for 2 minutes. |
| Test environment: | Temp.: 26 °C Humid.: 54% Press.: 1 010mbar |
| Test Instruments: | Refer to section 6.0 for details |

| | |
|---------------|----------------------------------|
| Test mode: | Refer to section 5.2 for details |
| Test results: | Pass |


Measurement Record:

| Lead under Test | Level (\pm kV) | Coupling Direct/Clamp | Observations (Performance Criterion) | Result |
|-----------------|-------------------|--------------------------|---|--------|
| L | ± 1.0 | Direct | A | Pass |
| N | ± 1.0 | Direct | A | Pass |
| L-N | ± 1.0 | Direct | A | Pass |

Remark:

A: Normal performance within the specification limits

7.2.5 Surge
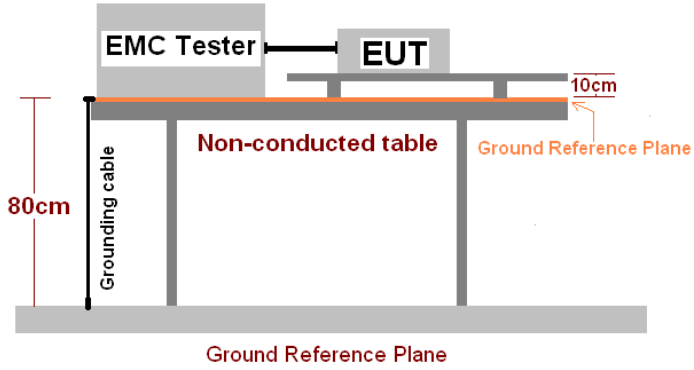
| | |
|------------------------|--|
| Test Requirement: | ETSI EN 301 489-17 |
| Test Method: | ETSI EN 61000-4-5 |
| Test Level: | ±1kV Live to Neutral: Differential mode |
| Polarity: | Positive & Negative |
| Test Interval: | 60s between each surge |
| No. of surges: | 5 positive, 5 negative at 0°, 90°, 180°, 270°. |
| Performance Criterion: | B |
| Test setup: |  <p>The diagram illustrates the test setup. An EMC Tester and an EUT (Equipment Under Test) are positioned on a non-conducted table. The table is 80cm high and has a grounding cable connected to a ground reference plane. The EUT is 10cm above the table surface. A ground reference plane is also shown below the table.</p> |
| Test Procedure: | <ol style="list-style-type: none"> 1. For line-to-line coupling mode, provide a 1kV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points, and for active line / neutral lines to ground are same except test level is 2kV. 2. At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are applied during test. 3. Different phase angles are done individually. 4. Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test. |
| Test environment: | Temp.: 26 °C Humid.: 53% Press.: 1 010mbar |
| Test Instruments: | Refer to section 6.0 for details |
| Test mode: | Refer to section 5.2 for details |
| Test results: | Pass |


Measurement Record:

| Location | Level(kV) | Pulse No | Surge Interval | Phase(deg) | Observations (Performance Criterion) |
|----------|-----------|----------|----------------|------------|---|
| L-N | ± 1 | 5 | 60s | 0° | A |
| | | | | 90° | A |
| | | | | 180° | A |
| | | | | 270° | A |

Remark:

A. Normal performance within the specification limits

7.2.6 Voltage Dip and Voltage Interruptions
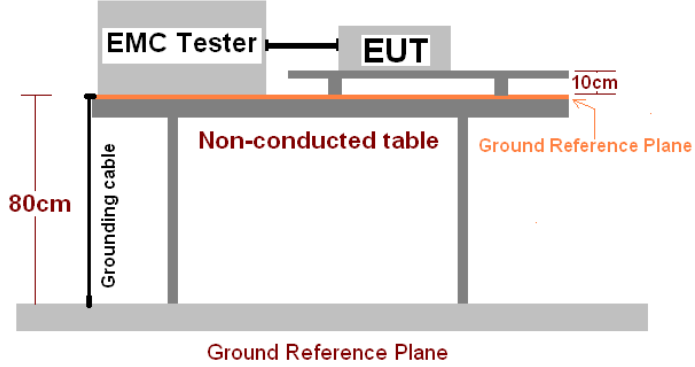
| | |
|------------------------------|--|
| Test Requirement: | ETSI EN 301 489-17 |
| Test Method: | EN 61000-4-11 |
| Test Level: | 0% of VT(Supply Voltage) for 0.5 period 0% of VT(Supply Voltage) for 1.0 period 70% of VT(Supply Voltage) for 25 period 0% of VT(Supply Voltage) for 250 period |
| No. of Dips / Interruptions: | 3 per Level |
| Performance Criterion: | 0% VD, 0.5 period----Performance criterion: B 0% VD, 1 period----Performance criterion: B 70% VD, 25 period----Performance criterion: C 0% VI, 250 period----Performance criterion: C |
| Test setup: |  <p>The diagram illustrates the test setup. An EMC Tester and an EUT are positioned on a Non-conducted table. The table is supported by a Ground Reference Plane. A Grounding cable is connected to the table, and a 10cm distance is marked between the table and the EUT. The table height is 80cm.</p> |
| Test Procedure: | <ol style="list-style-type: none"> 1>.The EUT and test generator were setup as shown on above setup photo. 2>.The interruptions are introduced at selected phase angles with specified duration. 3>.Record any degradation of performance. |
| Test environment: | Temp.: 26 °C Humid.: 53% Press.: 1 010mbar |
| Test Instruments: | Refer to section 6.0 for details |
| Test mode: | Refer to section 5.2 for details |
| Test results: | Pass |

Measurement Record:

| Test Level U_T | Duration (Periods) | Phase angle | No of dropout | Time between dropout | Observations (Performance Criterion) |
|---------------------|-----------------------|---------------------|------------------|-------------------------|--|
| 0% | 0.5 | 0°, 90°, 180°, 270° | 3 | 10s | A |
| 0% | 1.0 | 0°, 90°, 180°, 270° | 3 | 10s | A |
| 70% | 25 | 0°, 90°, 180°, 270° | 3 | 10s | A |
| 0% | 250 | 0°, 90°, 180°, 270° | 3 | 10s | B |



Remark:

A: No loss of function was observed.

B: During the test, the charging stopped, but after the test, the power charger can automatically return to normal

8 Test Setup Photo

Radiated Emission

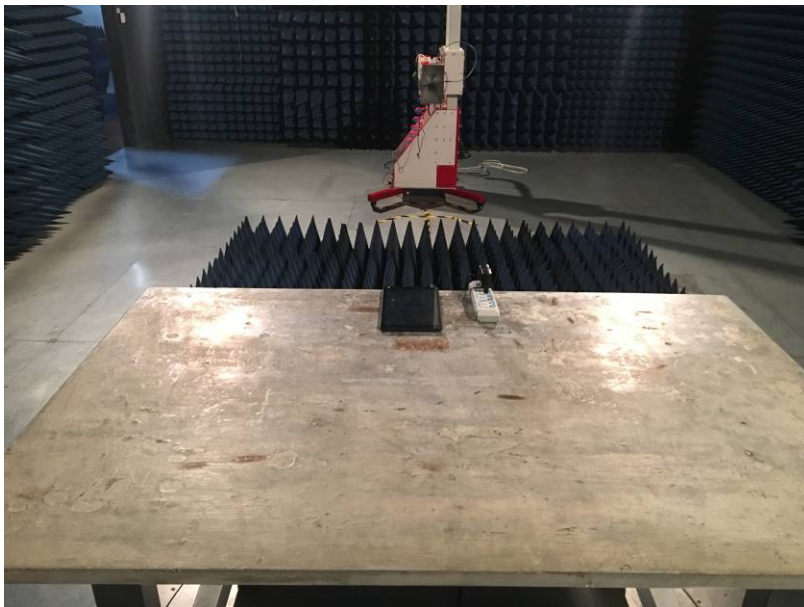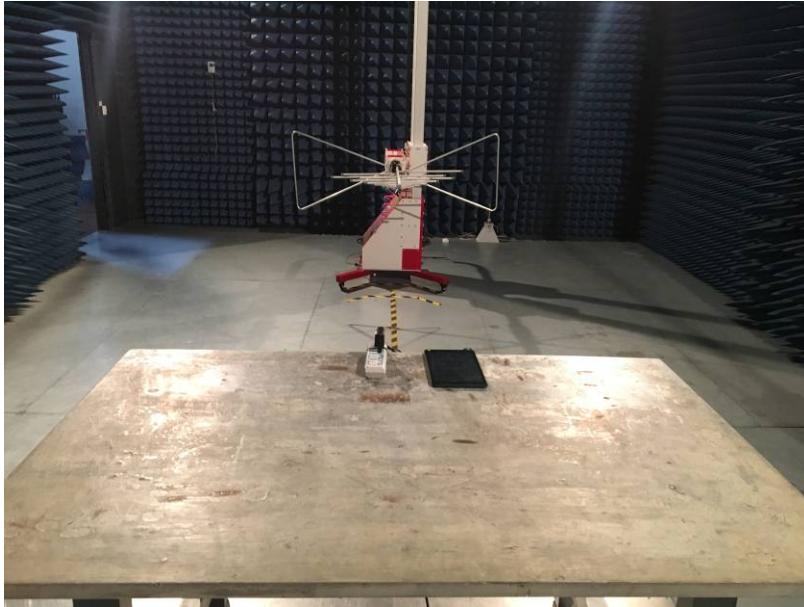

Conducted Emission



Flicker



ESD




Surges/EFT/V-dips






RS






9 EUT Constructional Details


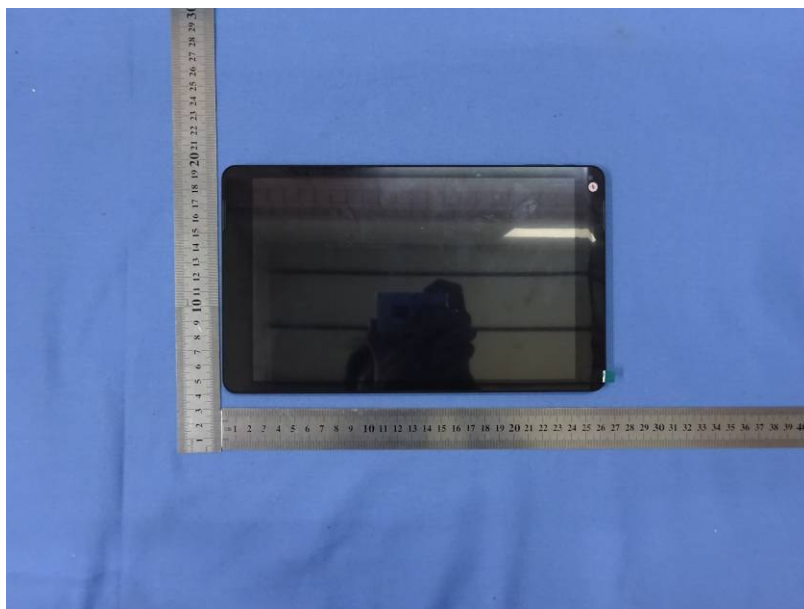


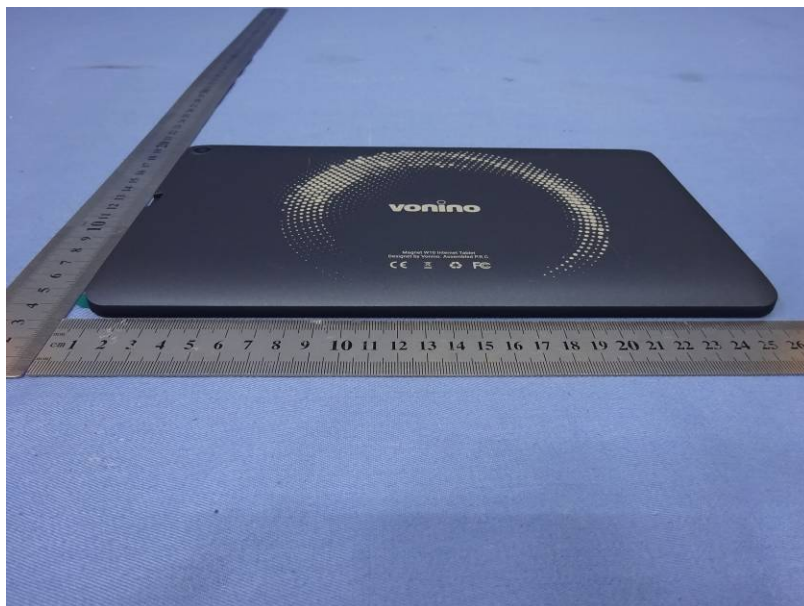

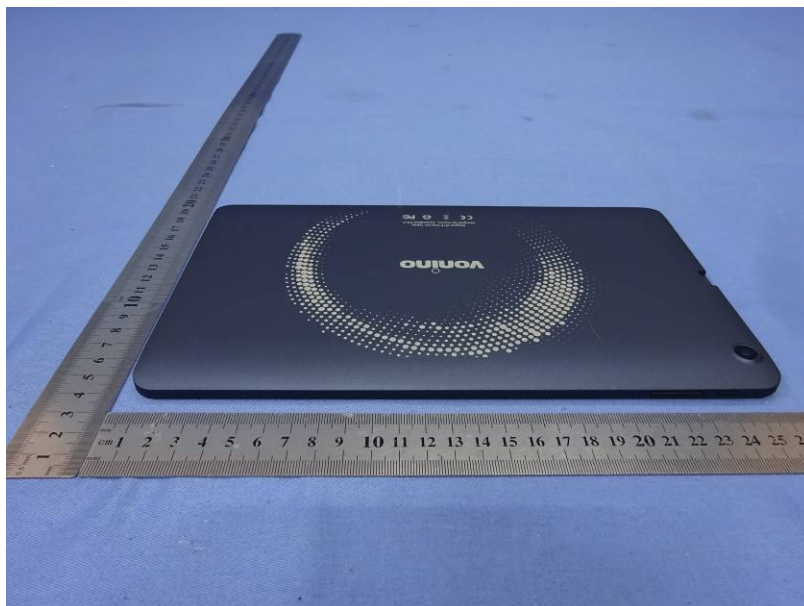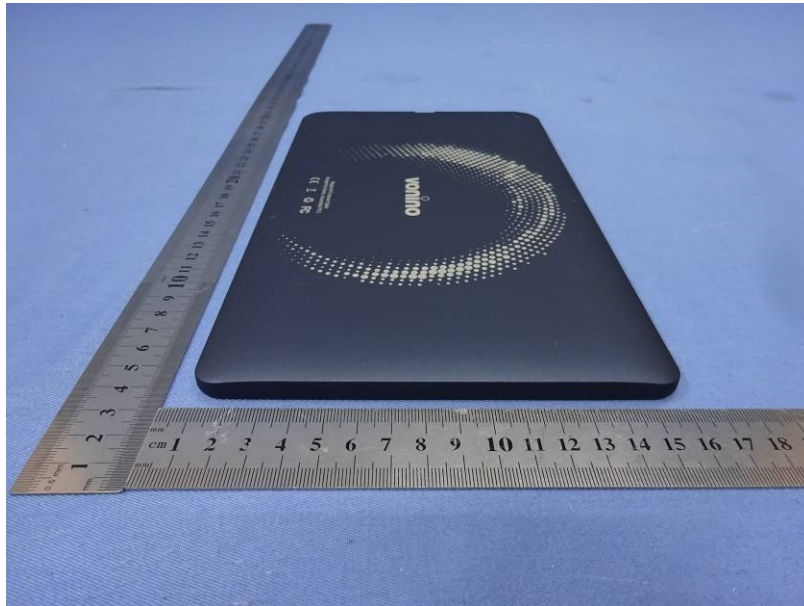

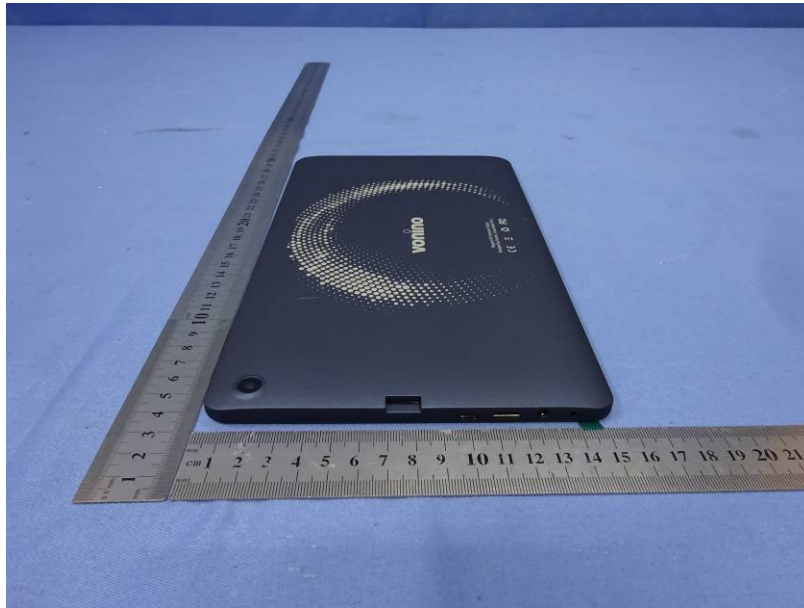

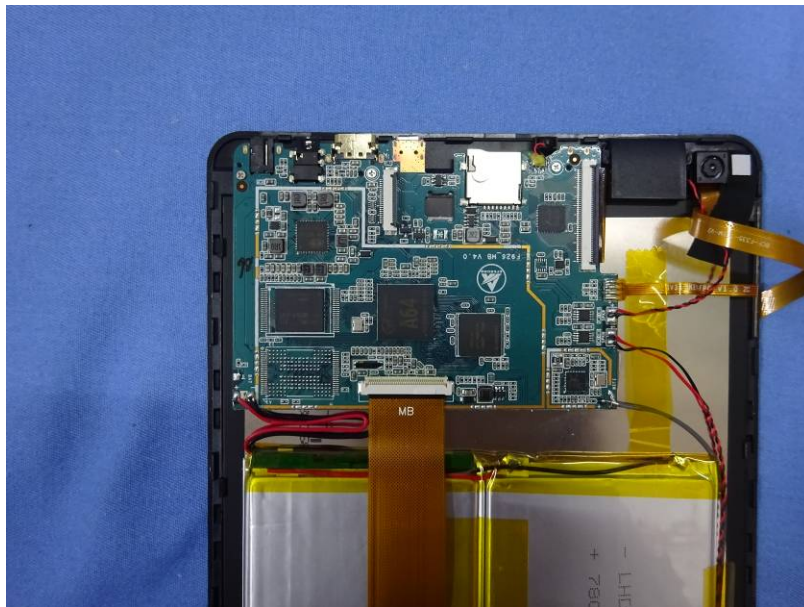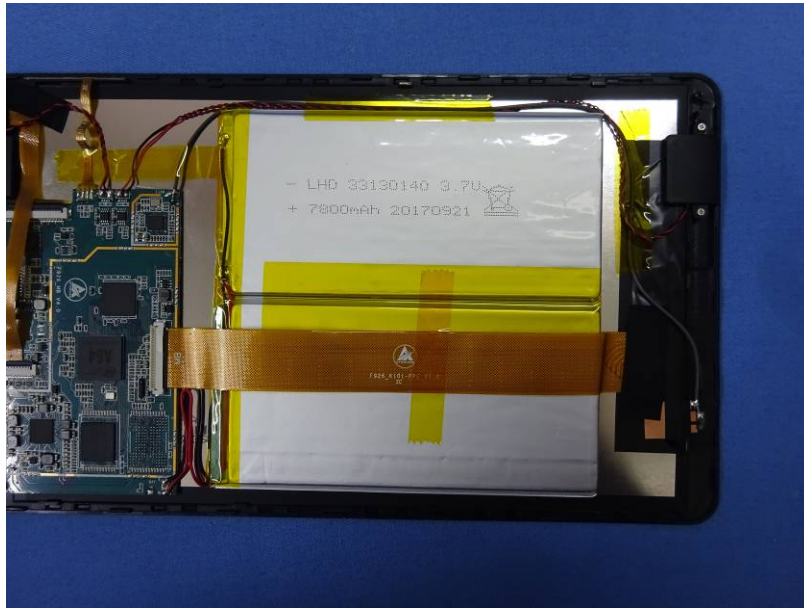

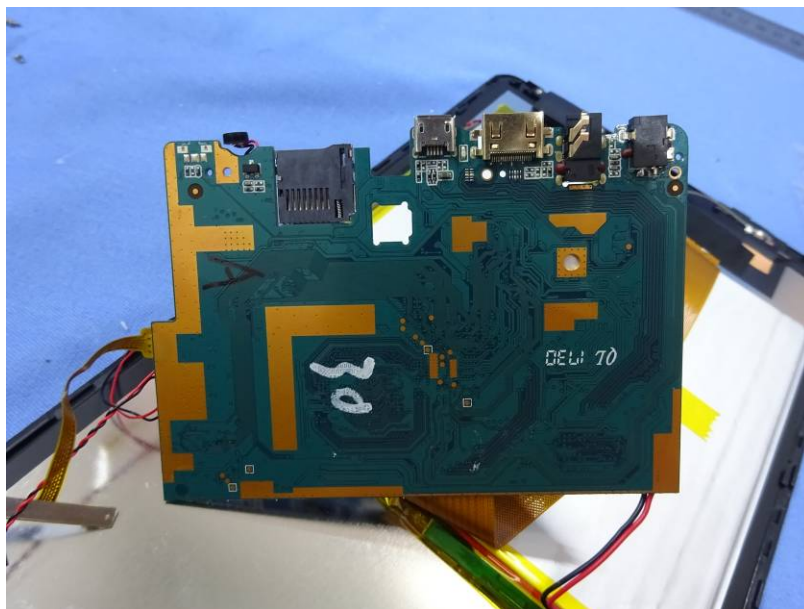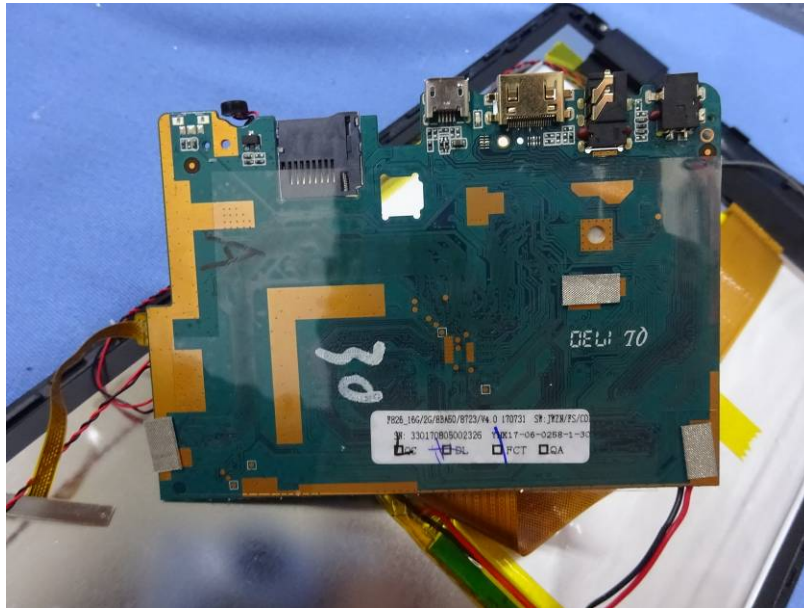



-----End-----